

LOTO


LO.NN.005.OTA.FI




N° LED	w	Lm to the light source	Luminous efficiency	Chromatic deviation	CRI	٥٥	IP67	<u>A</u>	R/V/B		
01	1.2	110	>92Lm W	SDCM 2	> 80 - >90	=	n against the dust persion protection	DIFFUSE- 7°- 25°- 40°	• • •	-	2700K – 3000K – 4000K
01	3.6	1	-	-	•	=	n against the dust persion protection	40°	•	RGBW	

^{*}The above data refer to a temperature of 3000K

Model	Description	Dimensions Ø44.5 x 50mm	Fixing formwork Ø40 x 100mm	Masonry fixing formwork Ø66 x100mm	
	Floor recessed LED lighting body in aluminium/stainless steel, thick transparent polycarbonate screen. It is provided with 50 cm of neoprene bipolar cable for the electrical connection. Floor outdoor installation by suitable formwork. Fixing by elastic ring or O-ring, depth dimensions 100mm.	9.05 02 Ø 34.5	Ø 35 Ø 40	Ø 79 Ø 40 Ø 35	

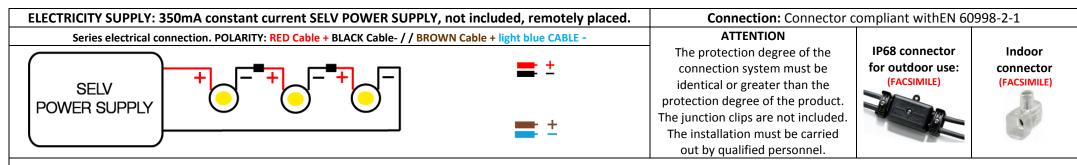

• ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. The connection to the electricity grid must be carried out only after completing the wiring of all the components. If this simply rule is not respected, the lighting source will be irremediably damaged. The installation must be carried out by qualified personnel.





It must not be provided with a electrical ground of protection

DIMMABLE By dimmable power supply

OPERATING TEMPERATURE -20°C +40°C



www.brillamenti.it

Separate waste collection of electric and electronic equipment

Made in Italy
Projected, manufactured and
assembled in Italy



INSTALLATION AND USE MANUAL

NO



The formwork must not be higher than the finished floor.

NO




The formwork must not be lower than the finished floor.

YES



The formwork must be flush with the finished floor.



Carry out the electrical connection paying attention to the polarity of the cables.

www.brillamenti.it



Pressure insertion of the Loto spotlight into the formwork.
Finished work.

WARNING AND PROVISIONS

ATTENTION!

The appliance safety is guaranteed only by respecting, both during installation and employment phase, of the following instructions. It is therefore necessary to archive the present document.

WARNINGS:

- The power supply voltage must be removed during the installation and during any operation.
- The appliance must not be modified or tampered with in any way. Every modification can compromise the safety of the appliance, making it dangerous.

 Hi.Project srl refuses any responsibility for modified or tampered with products. Modifications or tampering with the product, if not authorized by the company (Hi.Project s.r.l.), nullify any direct and indirect responsibility of the manufacturer as well as the warranty.
- The appliance is free from the photobiological risk. Please follow the instructions of this data sheet.
- The product is to be considered a "Containing Product" and is not subject to maintenance. The light source can only be replaced by the manufacturer. For further information please contact Hi. Project s.r.l.
- If the flexible power cable is damaged, it can be substituted only by the manufacturer. For further information please contact Hi.Project s.r.l.
- Each product, at the end of its life, must be committed to a waste storage center specialized in electrical and electronic equipment. Alternatively, it can be returned to the manufacturer.

WARRANTY CONDITIONS:

Our products are guaranteed for 24 months from the date of purchase. The warranty only covers construction defects attributable to the manufacturer. The warranty does not include all the activities necessary for the product to arrive free port at the manufacturer for repair.

The warranty is void if the malfunction is due to: improper use of the product, tampering, repairs not authorized by Hi. Project S.r.l., negligence of the installer, failure to comply with the product rating plate, damage due to natural causes such as lightning or power surges, use of power supplies or drivers not approved by Hi. Project S.r.l. and/or in any case not compliant with the technical regulations that regulate the European market, damage caused by wrong connections or connections with an IP degree lower than the purchased product, damage caused during the transport (even if the transport is organized by Hi. Project S.r.l. on behalf of the Customer), other causes that are not expressly and unequivocally referred to the defectiveness of the product itself.

PRODUCT CLEANING INSTRUCTIONS

- To clean the appliance, use exclusively a soft cloth, possibly moistened with water and neutral soap.
- Warning: do not use aggressive cleansers, alcohol or solvents.

The information contained in this document may be changed by Hi.Project s.r.l. at any time without notice and does not imply the assumption, even implicit, of any obligation on the part of Hi. Project Srl.

Hi. Project SrI refuses all responsibility if the installation is not carried out by qualified personnel and in compliance with current regulations.

ENERG F Entity Elettronica S.r.l. 1200EN0786-930-0-XPE2M00 A B C D E F G G 2 kWh/1000h

3000°K