




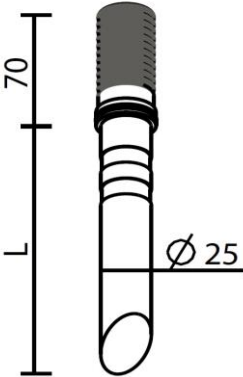

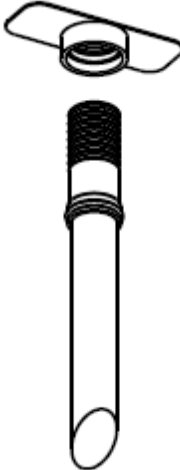
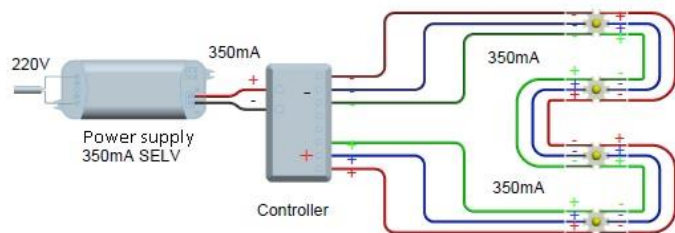


N° LED	W	Lm to the light source	Luminous efficiency	Chromatic deviation	CRI	 IP40	 DIFFUSE	R / V / B	 RGB	
01	3,6	-	-	-	-	protection against solid bodies of dimensions greater than 1mm		-		- - -

Model	Description	Dimensions Ø30 x 70+L mm	Fixing hole Ø40mm Formwork 37 x 100 x 15mm	Assembly of the body by screw
	Recessed ceiling Led light body in aluminum. Aesthetic part in transparent methacrylate worked at drawing. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on drywall, wood. Fixing by specific threaded formwork.		 Hole Ø 40 mm for formwork insertion	

ELECTRICITY SUPPLY: 350mA constant current SELV POWER SUPPLY, not included, remotely placed.

Series electrical connection. POLARITY:



Connection: Connector compliant with EN 60998-2-1 standards

ATTENTION

The protection degree of the connection system
must be identical or greater than the protection
degree of the product.
The junction clips are not included.
The installation must be carried out by qualified
personnel.

(FACSIMILE)



ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. The connection to the electricity grid must be carried out only after completing the wiring of all the components. If this simply rule is not respected, the lighting source will be irremediably damaged. The installation must be carried out by qualified personnel.



Compliant with European standards
EMC – RoHS – REACH – Ecodesign



It must not be provided with a
electrical ground of protection






DIMMABLE
By dimmable power
supply

OPERATING TEMPERATURE
-20°C +40°C



Separate waste collection of electric
and electronic equipment

Made in Italy
Projected, manufactured and
assembled in Italy

				
Define the position and carry out the hole compartment Ø40mm	Insert the formwork	Fix the formwork with two self-tapping screws for drywall	Make sure that the hole protection cap is correctly positioned before carrying out the necessary finishing	Connect the electric wires and insert the light body by screwing to the formwork until it is flush. Before screwing it make three "empty" turns clockwise in the opposite way to that of screwing.

SINCE THE METHACRYLATE COMPONENT IS VERY DELICATE, IT IS DELIVERED WRAPPED IN AN ANTI-SCRATCH PROTECTIVE FILM. IT IS STRONGLY RECOMMENDED TO REMOVE THE FILM ONLY AFTER YOU HAVE COMPLETED ALL THE ASSEMBLY AND FINISHING OPERATIONS. FOR ANY CLEANING, USE ONLY A SOFT CLOTH (microfibre) THAT IS PERFECTLY CLEAN AND WELL DAMPENED WITH WATER. IT IS POSSIBLE TO USE A NON-ABRASIVE DELICATE NEUTRAL SOAP. DO NOT USE PAPER OR CLOTH THAT MAY CREATE ABRASIONS.

WARNING AND PROVISIONS

ATTENTION!

The appliance safety is guaranteed only by respecting, both during installation and employment phase, of the following instructions. It is therefore necessary to archive the present document.

WARNINGS:

- The power supply voltage must be removed during the installation and during any operation.
- The appliance must not be modified or tampered with in any way. Every modification can compromise the safety of the appliance, making it dangerous. Hi.Project srl refuses any responsibility for modified or tampered with products. Modifications or tampering with the product, if not authorized by the company (Hi.Project s.r.l.), nullify any direct and indirect responsibility of the manufacturer as well as the warranty.
- The appliance is free from the photobiological risk. Please follow the instructions of this data sheet.
- The product is to be considered a "Containing Product" and is not subject to maintenance. The light source can only be replaced by the manufacturer. For further information please contact Hi.Project s.r.l.
- If the flexible power cable is damaged, it can be substituted only by the manufacturer. For further information please contact Hi.Project s.r.l.
- Each product, at the end of its life, must be committed to a waste storage center specialized in electrical and electronic equipment. Alternatively, it can be returned to the manufacturer.

WARRANTY CONDITIONS:

Our products are guaranteed for 24 months from the date of purchase. The warranty only covers construction defects attributable to the manufacturer. The warranty does not include all the activities necessary for the product to arrive free port at the manufacturer for repair. The warranty is void if the malfunction is due to: improper use of the product, tampering, repairs not authorized by Hi. Project S.r.l., negligence of the installer, failure to comply with the product rating plate, damage due to natural causes such as lightning or power surges, use of power supplies or drivers not approved by Hi. Project S.r.l. and/or in any case not compliant with the technical regulations that regulate the European market, damage caused by wrong connections or connections with an IP degree lower than the purchased product, damage caused during the transport (even if the transport is organized by Hi. Project S.r.l. on behalf of the Customer), other causes that are not expressly and unequivocally referred to the defectiveness of the product itself.

PRODUCT CLEANING INSTRUCTIONS

- To clean the appliance, use exclusively a soft cloth, possibly moistened with water and neutral soap.
- Warning: do not use aggressive cleansers, alcohol or solvents. The information contained in this document may be changed by Hi.Project s.r.l. at any time without notice and does not imply the assumption, even implicit, of any obligation on the part of Hi. Project Srl. Hi. Project Srl refuses all responsibility if the installation is not carried out by qualified personnel and in compliance with current regulations.

EN1121 - Star XM-L RGB



Entity elettronica
1200EN1911-RGBW-005



1
kWh/1000h



2019/2015

