






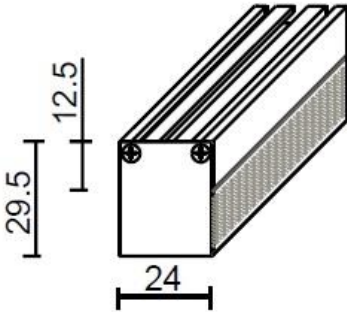
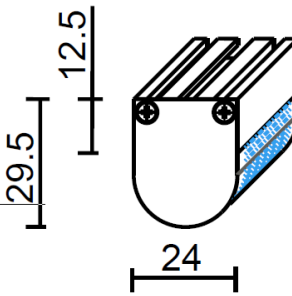
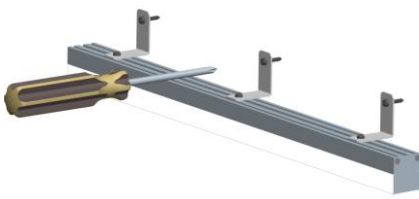

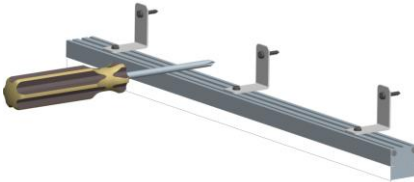

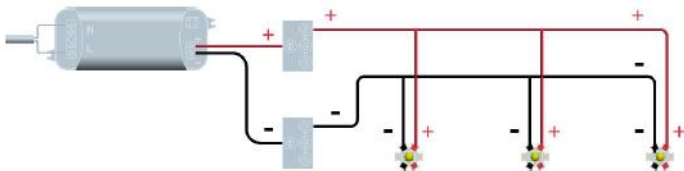





N° LED	W/mt	Lm to the light source				R / V / B		
060	15	-	24V	IP40	DIFFUSE	-	RGB	- - -
140	15	1800	24V	IP40	DIFFUSE	-	-	2700K 3000K 4000K
128	23	3200	24V	IP40	DIFFUSE	-	-	2700K 3000K 4000K

Model	Description	Dimensions 24 x 29.52 x L mm
 Round	 Square	<p>On-wall/ceiling Led bar with aluminum terminals. Finish: anodized aluminum silver grey color, other colors on request. Screen: opal with rounded or prismatic shape. It is provided with 25cm bipolar cable for the electrical connection. Maximum length 2000mm (longer lengths on request). Indoor installation on any rigid surface by suitable "L" brackets. Fixing by screws, suitable to the support, with maximum diameter 3mm not supplied by us.</p>  

Fixing by bracket ST.031.031 with screws maximum diameter 3mm	Fixing by bracket ST.031.014 with screws maximum diameter 3mm
  31x31x15	  31x14x15

Parallel electrical connection 24V Polarity: RED cable + BLACK cable -	ONLY FOR 24V RGB Connection to the pilot module	Connection: Connector compliant with EN 60998-2-1
	<p>Negative = red Negative = blue Negative = green Positive = black</p>	<p>(FACSIMILE)</p> 

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not in voltage. If this simply rule is not respected, the lighting source will be irretrievably damaged.

 Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASS III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 24Vdc constant voltage / Only for 24Vdc RGB version, please see the connection to the pilot module	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
HI Project Srl	Via Mario Luciani 4/E - 32032 Feltre (BL)	Tel. 0439 310098	<a href="mailto:info@hiproject.it">info@hiproject.it</a>	<a href="http://www.brillamenti.it">www.brillamenti.it</a>
			CF - PI e n. isc. imprese 00967030255	