


Cubetto Slim CU.NN.060.OTA.FI



N° LED	w	Lm to the light source	- A -		<u> </u>	R/V/B		
03	3.6	330	350mA	IP40	DIFFUSE – 7° - 25° - 40°	-	•	2700K 3000K 4000K
07	8.4	770	350mA	IP40	DIFFUSE – 7° - 25° - 40°	-	-	2700K 3000K 4000K

Model	Description	Description			
	Screen: transparent polycarbonate. It is provided with 50cm bipolar cable for the electrical indoor installation on any rigid plane surface.	Finish: white RAL 9016 varnished – other colors on request. Screen: transparent polycarbonate. It is provided with 50cm bipolar cable for the electrical connection to the remote power supply.			

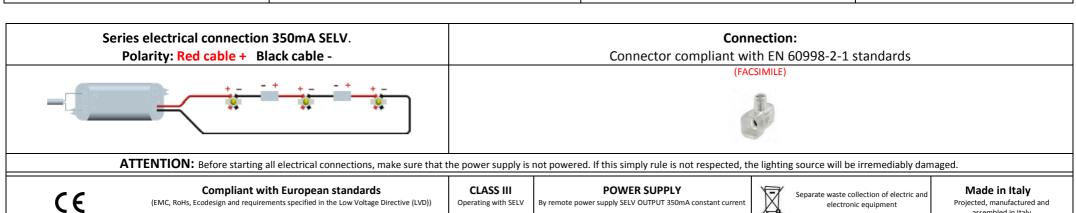

Do the electrical connection

(EMC, RoHs, Ecodesign and requirements specified in the Low Voltage Directive (LVD))

Operating with SELV

Fx the element of spotlight to the ceiling with

countersunk screw with maximum diameter 5mm

Final result

By remote power supply SELV OUTPUT 350mA constant current

Screw the lighting body to the rosette