


Cubetto Slim CU.NN.060.OTA.FI



N° LED	w	Lm to the light source	-A-	↔	<u> </u>	R/V/B				
03	3.6	330	350mA	IP40	7° - 25° - 40°	-	-	2700K	3000K	4000K
01	6,3	742	350mA	IP40	20°- 35° - 50°	-	-	2700K	3000K	4000K

Model	Model Description				
	On-ceiling Led light body in aluminum. Finish: white RAL 9016 varnished – other colors on Screen: transparent polycarbonate. It is provided with 50cm bipolar cable for the electr Indoor installation on any rigid plane surface. Fixing by two countersunk screws with maximum d	100x100			

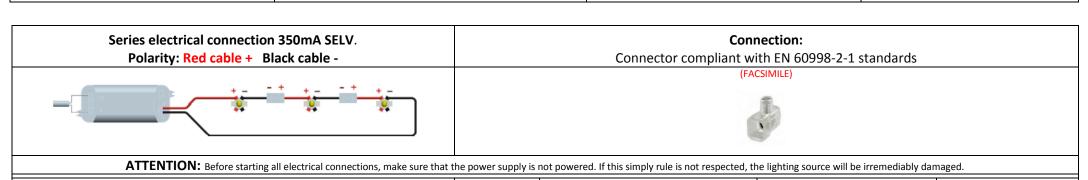

 ϵ

Do the electrical connection

Compliant with European standards

(EMC, RoHs, Ecodesign and requirements specified in the Low Voltage Directive (LVD))

CLASS III

Operating with SELV

Fix the element of spotlight to the ceiling with

countersunk screw with maximum diameter 5mm



Separate waste collection of electric and electronic equipment

Made in Italy Projected, manufactured and assembled in Italy

Final result

Screw the lighting body to the rosette