




N° LED	W	Lm to the light source				R / V / B		
01	1.2	110	350mA	IP65	DIFFUSE - 7° - 25° - 40°		-	2700K 3000K 4000K

Model	Description	Dimensions Ø38 x 47 mm
	On-wall/ceiling/floor Led floodlight in aluminum. It is provided with 50cm neoprene cable for the electrical connection. Indoor/outdoor installation on any rigid surface by specific stainless steel bracket. Fixing by one screw.	

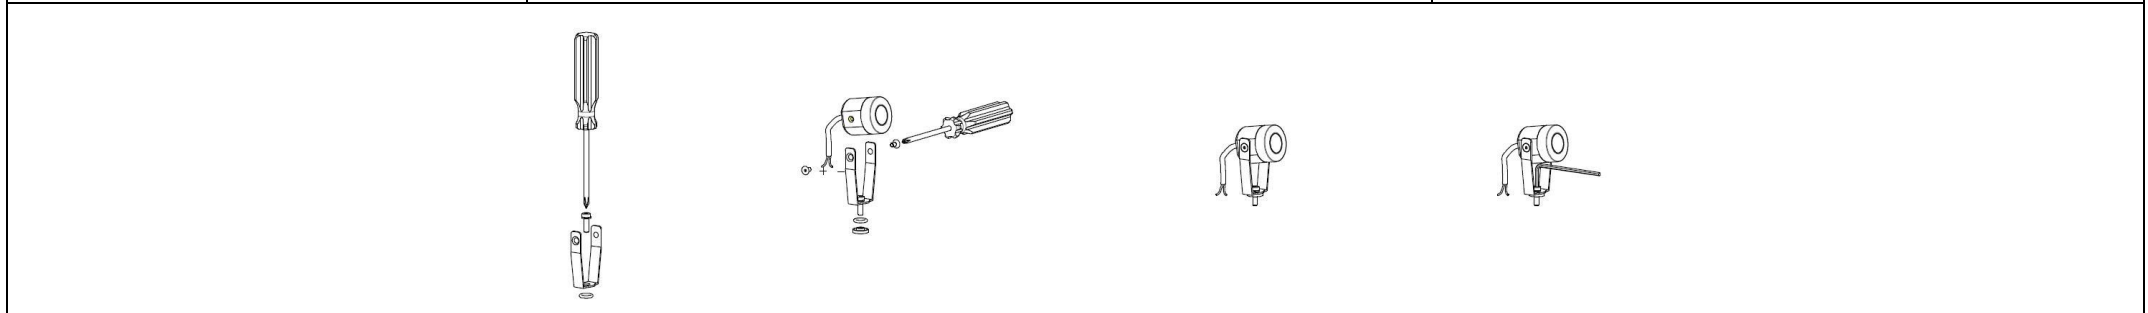

Series electrical connection 350mA SELV. Polarity: <b>Red cable +</b> Black cable -	IP68 connector for example Steab Paguro 5664 or similar. Connector compliant with EN 60998-2-1 standards
	 Connection to be made in a watertight place

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simple rule is not respected, the lighting source will be irretrievably damaged.

<b>Compliant with European standards</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASS III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 350mA constant current	Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
--	---	--	--	--