





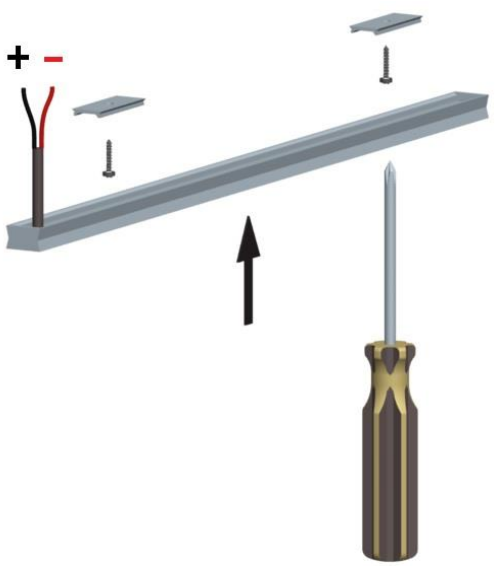
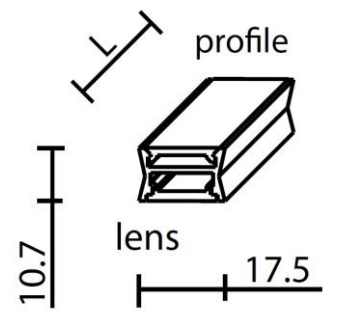

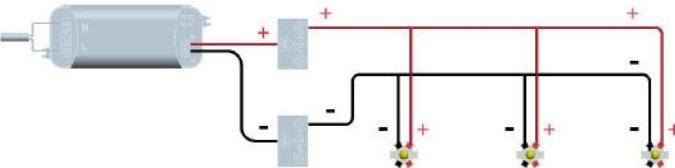





N° LED	W/mt	Lm to the light source				R / V / B		
060	15	-	24V	IP40	DIFFUSE	-	RGB	- - -
140	15	1800	24V	IP40	DIFFUSE	-	-	2700K 3000K 4000K

Model	Description		Dimensions 17,5 x 10,7 x L mm
	<p>Free-standing or recessed Led bar for wall/ceiling in aluminum, plastic terminals.</p> <p>Finish: silver grey anodized aluminum, other colors on request.</p> <p>Screen: opal or transparent.</p> <p>Plastic terminals.</p> <p>It is provided with 25cm bipolar cable for the electrical connection.</p> <p>Maximum length 2000mm (longer lengths on request).</p> <p>Indoor installation on any rigid surface by specific snap clips.</p>		<p></p> <p>Fixing by clip GR.013.003 with screws maximum diameter 3mm</p> <p> 13x3x40</p>

Parallel electrical connection 24V Polarity: <b>RED cable +</b> <b>BLACK cable -</b>	ONLY FOR 24V RGB Connection to the pilot module	Connection: Connector compliant with EN 60998-2-1
	<p>Negative = red</p> <p>Negative = blue</p> <p>Negative = green</p> <p>Positive = black</p>	<p>(FACSIMILE)</p> 

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not in voltage. If this simply rule is not respected, the lighting source will be irretrievably damaged.

	<b>Compliant with European standards</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASS III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 24Vdc constant voltage / Only for 24Vdc RGB version, please see the connection to the pilot module	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
--	--	---	---	--	--