BRILLAMENTI®
OFFICINA DELLA LUCE

Barra da Appoggio BA2.NNN.CO.A.TO.FS

N° LED	W/mt	Lm To the light source				R / V / B				
060	15	-	24V	IP40	DIFFUSE	-	RGB	-	-	-
120	15	1200	24V	IP40	DIFFUSE	-	-	2700K	3000K	4000K

Model	Description	Dimensions 17,5 x 10,7 x L mm
	Free-standing or recessed Led bar for wall/ceiling, maximum size 17,5mm, plastic terminals. It is provided with 25cm bipolar cable for the electrical connection. Maximum length 1050mm. Indoor installation on any rigid surface by specific snap clips.	

Parallel electrical connection 12V/24V

Polarity: RED cable + BLACK cable -

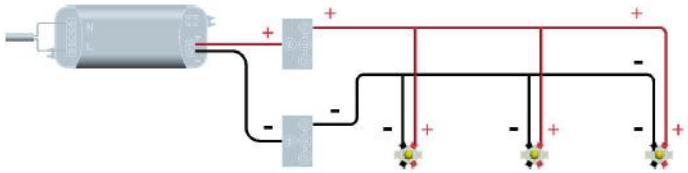

Connection:
connector compliant with EN 60998-2-1 standards 1

(FACSIMILE)

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irremediably damaged.

CE

Compliant with European standards
(EMC, RoHs, Ecodesign and requirements specified in the Low Voltage Directive (LVD)

CLASS III
Operating with SELV

POWER SUPPLY
By remote power supply SELV OUTPUT 24V constant voltage

SEPARATE WASTE COLLECTION OF ELECTRIC AND ELECTRONIC EQUIPMENT

Made in Italy
Projected, manufactured and assembled in Italy

HI Project Srl *Via Mario Luciani 4/E - 32032 Feltre (BL)* *Tel. 0439 310098* info@hiproject.it www.brillamenti.it *CF - PI e n. isc. reg. imprese 00967030255*