


Barra da Appoggio BA3.NNN.CO.A.TO.FS



N° LED	W/mt	Lm to the light source	-A-	合	<u>A</u>	R/V/B				
060	15	-	24V	IP40	DIFFUSE	-	RGB	-	-	-
140	15	1200	24V	IP40	DIFFUSE	-	-	2700K	3000K	4000K
128	23	3200	24V	IP40	DIFFUSE	-	-	2700K	3000K	4000K

Model	Description	Dimensions 24 x 35 x L mm	Free-standing Bar	Accessories	Suspension Bar	Accessories
	On-wall/ceiling Led bar with aluminum terminals. Reducing the electric power it is available in suspended version. Finish: anodized aluminum silver grey color, other colors on request. Screen: opal/semi-opal, transparent. It is provided with 25cm bipolar cable for the electrical connection. Maximum length 2000mm (longer lengths on request). Indoor installation on any rigid plane surface by suitable clip. Clip fixing by screws suitable to the support not supplied by us.	<u>SS</u> <u>24</u>		Clip GR 019.010		95227 95339 Profile GR 019.01

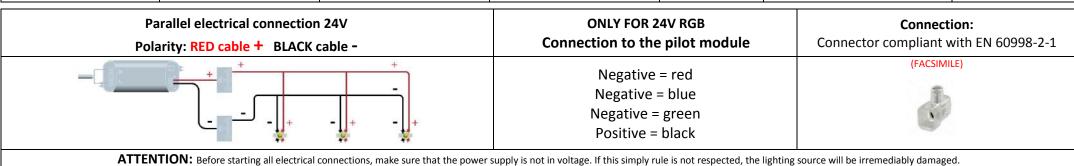

 ϵ

Compliant with European standards (EMC, RoHs, Ecodesign and requirements specified in the Low Voltage Directive (LVD))

CLASS III Operating with SELV

POWER SUPPLY

By remote power supply SELV OUTPUT 24Vdc constant voltage / Only for 24Vdc RGB version, please see the connection to the pilot module



Separate waste collection of electric and electronic equipment

Made in Italy Projected, manufactured and assembled in Italy