





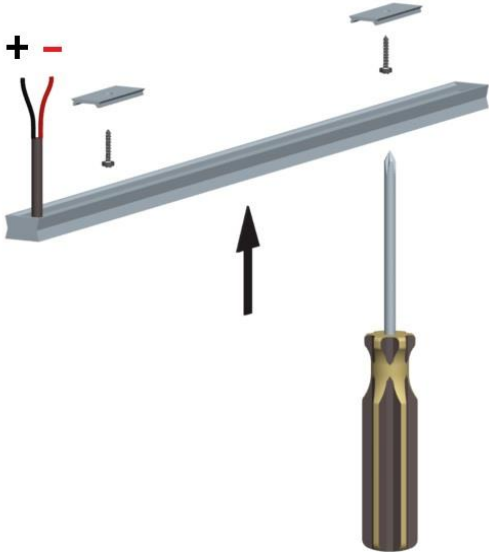
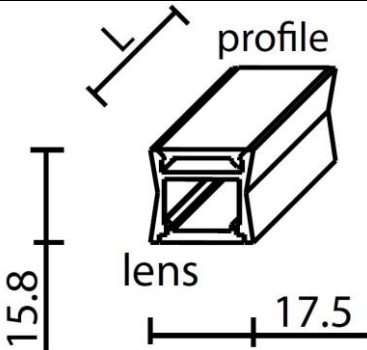

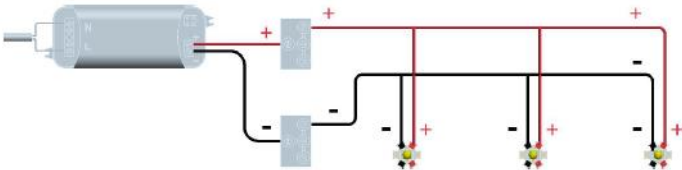





N° LED	W/mt	Lm to the light source				R / V / B		
060	15	-	24V	IP40	DIFFUSE	-	RGB	- - -
140	15	1800	24V	IP40	DIFFUSE	-	-	2700K 3000K 4000K

Model	Description	Fixing system with clips	Dimensions 17,5 x 10,7 x L mm
	Free-standing or recessed Led bar for wall/ceiling, plastic terminals. Finish: anodized aluminum silver grey color, other colors on request. Screen: opal white or transparent. It is provided with 25cm bipolar cable for the electrical connection. Maximum length 2000mm (longer lengths on request). Indoor installation on any rigid surface by specific clips.		 15.8 17.5 profile lens
			Fixing by suitable clips GR.013.003 with screws maximum diameter 3mm
			 13x3x40

Parallel electrical connection 24V Polarity: <b>RED cable +</b> <b>BLACK cable -</b>	ONLY FOR 24V RGB Connection to the pilot module	Connection: Connector compliant with EN 60998-2-1
	Negative = red Negative = blue Negative = green Positive = black	(FACSIMILE) 

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not in voltage. If this simply rule is not respected, the lighting source will be irretrievably damaged.

	<b>Compliant with European standards</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASS III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 24Vdc constant voltage / Only for 24Vdc RGB version, please see the connection to the pilot module	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
--	--	---	---	--	--