














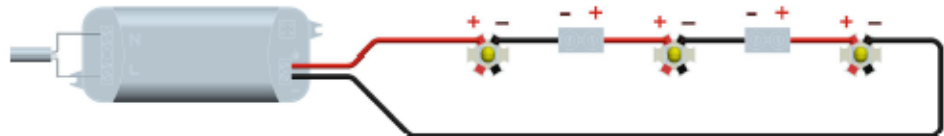



N° LED	W	Lm to the light source				R / V / B		
01	1.2	110	350mA	IP40	DIFFUSE		RGB	2700K 3000K 4000K
03	3.6	330	350mA	IP40	DIFFUSE	-	RGB	2700K 3000K 4000K

Model	Description	Dimensions Ø30 x 70+L mm	Fixing hole Ø40mm Formwork 37 x 100 x 15mm	Simplified assembly of the screw body
	Recessed ceiling Led light body in aluminum. Aesthetic part in transparent methacrylate worked at drawing. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on drywall, wood. Fixing by specific threaded formwork.			
				
Do the hole Ø40mm	Insert formwork	Fix formwork with two screw	Ensure that the protection cap of the hole is correctly positioned and make the necessary finishes	Connect electric wires and insert the light body by turning it counterclockwise. MAXIMUM 3 LAPS

Series electrical connection 350mA SELV. Polarity: RED cable + BLACK cable -	Connection: Connector compliant with EN 60998-2-1 standards
	(FACSIMILE) 

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

 Compliant to the European legislations (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	CLASS III Operating with SELV	POWER SOURCE By remote power supply SELV OUTPUT 350mA constant current	 SEPARATE WASTE COLLECTION OF ELECTRIC AND ELECTRONIC EQUIPMENT	Made in Italy Projected, manufactured and assembled in Italy
--	---	--	--	--