





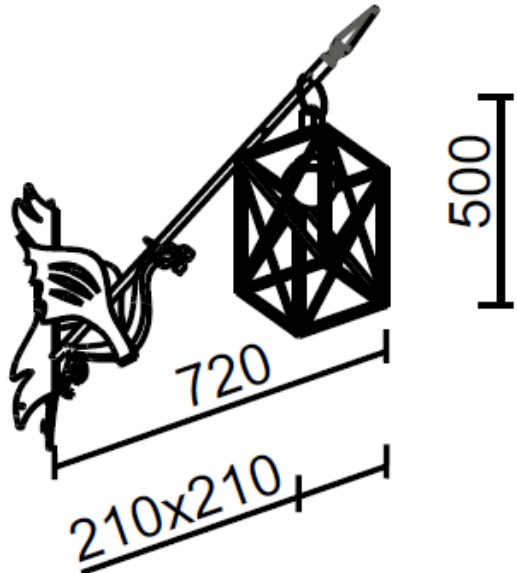




N° LED	W	Lm to the light source				R / V / B		
01	4	475	350mA	IP65	DIFFUSE	-	-	- 3000K -

Model	Description	Dimensions 720x 500x210mm
	<p>Led light body with wrought iron on 90° degrees walls, n°1 Led lighting source.</p> <p>It is provided with 1,5m cable for the electrical connection.</p> <p>Outdoor installation on any 90° angular surface that can hold a 10kg in embossed weight.</p> <p>Fixing by four screws not supplied by us.</p>	

Series electrical connection 350mA SELV. Polarity: Red cable + Black cable -	IP68 connector for example Steab Paguro 5664 or similar. Connector compliant with EN 60998-2-1 standards
	<p>(FACSIMILE)</p>  Connection to be made in a watertight place

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

 Compliant with European standards (EMC, RoHs, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	CLASS III Operating with SELV	POWER SUPPLY By remote power supply SELV OUTPUT 350mA constant current	 Separate waste collection of electric and electronic equipment	Made in Italy Projected, manufactured and assembled in Italy
---	---	--	--	--