




N° LED	W	Lm alla sorgente luminosa	A	IP65	DIFFUSE	R / V / B		
03	3.6	330	350mA	IP65	DIFFUSE	-	-	2700K 3000K 4000K

Modello	Descrizione	Dimensions Ø40 x L=1800mm with stake			
	<p>Aluminum Led light body. 360° emission light. Finish: faux corten varnished, other colors on request. Diffuser screen: thick white opal polycarbonate, IP65 protection degree in the lighting part. It is provided with 1m neoprene bipolar cable for the electrical connection. Outdoor/indoor installation, assembly: embedded in any type of soil with nylon stake.</p>			<p>CABLE HEIGHT FROM THE GROUND</p>	

Series electrical connection 350mA SELV.
Polarity: **Red cable + Black cable -**

Connection: IP68 connector for example Steab Paguro 5664 or similar compliant with EN 60998-2-1 standards

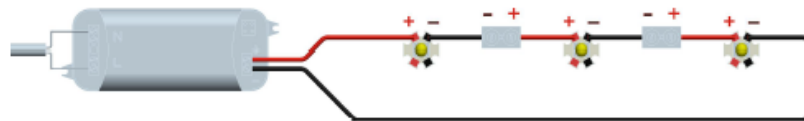

Connection to be made in a watertight place

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

<p>Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))</p>	<p>CLASS III Operating with SELV</p>	<p>POWER SUPPLY By remote power supply SELV OUTPUT 350mA constant current</p>	<p>Separate waste collection of electric and electronic equipment</p>	<p>Made in Italy Projected, manufactured and assembled in Italy</p>
--	---	--	---	--

N° LED	W	Lm alla sorgente luminosa				R / V / B		
03	3.6	330	350mA	IP65	DIFFUSE	-	-	2700K 3000K 4000K

Model	Description	Dimensions $\varnothing 40 \times L=1800\text{mm}$ with flange			
	<p>Aluminum Led light body. 360° emission light. Finish: faux corten varnished, other colors on request. Diffusor screen: thick white opal polycarbonate, IP65 protection degree in the lighting part. It is provided with 1m neoprene bipolar cable for the electrical connection. Outdoor/indoor installation, assembly: embedded in any type of soil with specific flange.</p>		<p>FL.100.150</p>		

Series electrical connection 350mA SELV.

Polarity: Red cable + Black cable -

Connection: IP68 connector for example Steab Paguro 5664 or similar compliant with EN 60998-2-1 standards



Connection to be made in a watertight place

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.



Compliant with European standards
(EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))

CLASS III
Operating with SELV

POWER SUPPLY
By remote power supply SELV OUTPUT 350mA constant current



Separate waste collection of electric and electronic equipment

Made in Italy
Projected, manufactured and assembled in Italy