





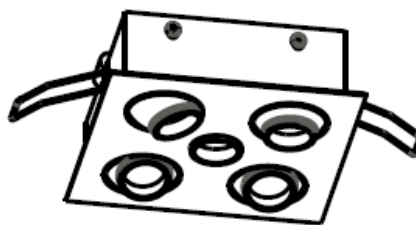
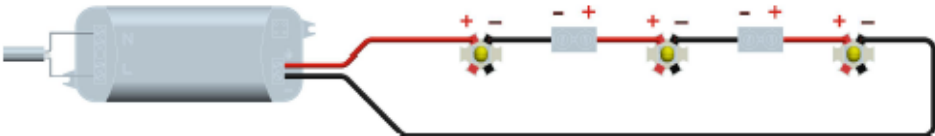





N° LED	W	Lm to the light source				R / V / B		
05	6	550	350mA	IP20	DIFFUSE – 10° - 25° - 40°	-	-	2700K 3000K 4000K

Model	Description	Dimensions 110 x110x50mm
	<p>Recessed ceiling steel Led light body. Number 4 Led mounted on swivel heads in every 20° directions independently, plus 1 central Led light not directable. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any plane rigid surface. Fixing with torsion springs. Finish: black varnished – customized RAL varnished.</p>	 110x110x50

Series electrical connection 350mA SELV.		Polarity: Red cable + Black cable -		Connection: connector compliant with EN 60998-2-1 standards	
				<div>(FACSIMILE)</div> 	
ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irremediably damaged.					
 Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))		CLASSE III Operating with SELV	POWER SUPPLY By remote power supply SELV OUTPUT 350mA constant current	 Separate waste collection of electric and electronic equipment	Made in Italy Projected, manufactured and assembled in Italy
HI Project Srl Via Mario Luciani 4/E - 32032 Feltre (BL)		Tel. 0439 310098		info@hiproject.it www.brillamenti.it CF - PI e n. isc. reg. imprese 00967030255	