





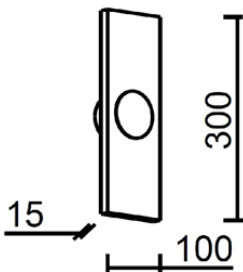
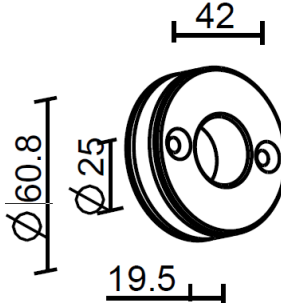
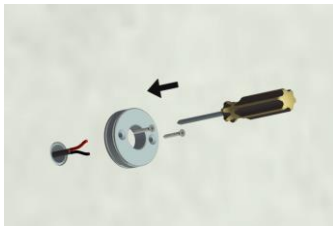
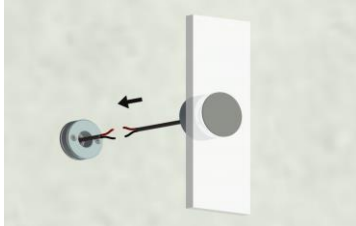
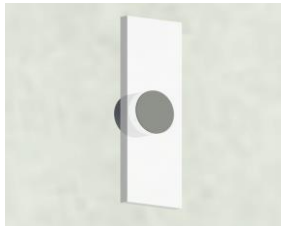





N° LED	W	Lm To the Led light source				R / V / B		
03	3.6	330	350mA	IP40	DIFFUSE	-	-	2700K 3000K 4000K
03	10.5	-	350mA see the pilot module	IP40	DIFFUSE	-	RGB	- - -

Model	Description	Dimensions 100x300x50mm	Wall support Ø 61mm
	Led lighting body in stainless steel and polycarbonate, for wall/ceiling standing. Finish: stainless steel, diffusor: transparent polycarbonate with regular geometric shape. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any rigid plane surface. Pressure fixing with specific aluminum support fixed by two screws not supplied by us.		
			
Aluminum support fixing with two countersunk screws with maximum diameter 5mm	Electrical connection and pressure fixing of the lamp body on an elastic ring	Finished work	

<b>Series electrical connection 350mA SELV.</b> <b>Polarity: RED cable + BLACK cable -</b>	<b>Connection:</b> Connector compliant with EN 60998-2-1 standards	<b>ONLY FOR RGB VERSION</b> <b>Connection to the pilot module</b>
	(FACSIMILE) 	+ = red - = red/black + = blue - = blue/black + = green - = green/black

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

<b>CE</b> <b>Compliant with European standards</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASS III</b> Operating with SELV	<b>POWER SOURCE</b> By remote power supply SELV OUTPUT 350mA constant current / Only for 350mA RGB version, please see the connection to the pilot module	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
---	---	---	--	--