





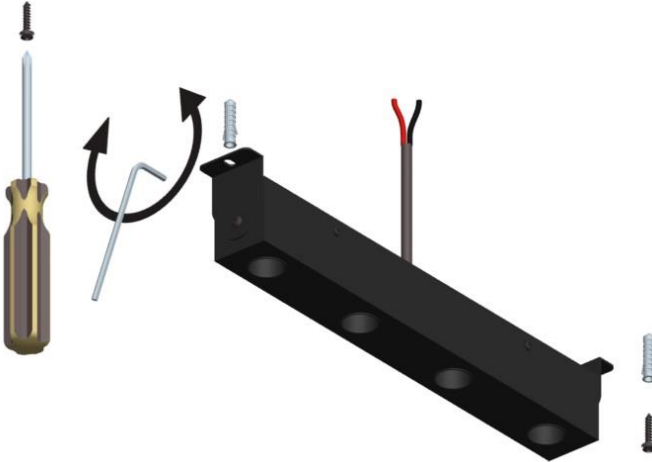
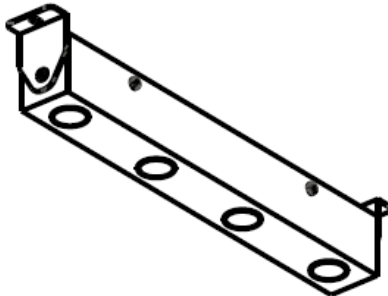
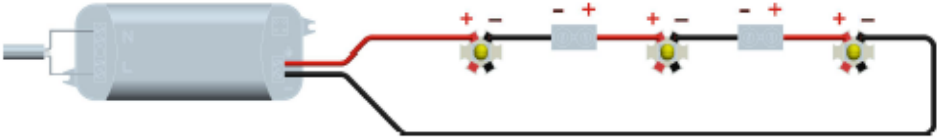




N° LED	W	Lm to the light source				R / V / B		
04	4.8	440	350mA	IP20	10°- 25°- 40°	-	-	2700K 3000K 4000K

Model	Description	Assembly	Dimensions 310 x 35 x 52mm
	On-wall/ceiling steel Led light body with directable light. Finish: black varnished, other colors on request. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any rigid plane surface. Fixing by two screws not supplied by us.		 <b>310x35x52</b>

<b>Series electrical connection 350mA. POLARITY: RED cable + BLACK cable -</b>	<b>Connection:</b> Connector compliant with EN 60998-2-1 standards
	 (FACSIMILE)

**ATTENZIONE:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

<b>CE</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASS III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 350mA constant current	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
---	---	--	--	--