
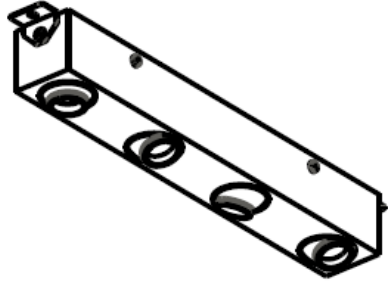
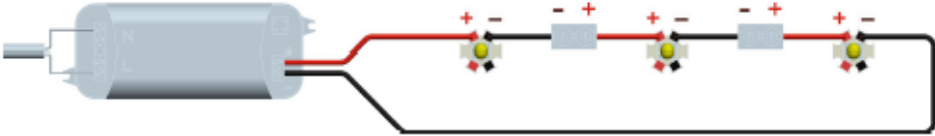





N° LED	W	Lm to the light source				R / V / B		
04	4.8	440	350mA	IP20	DIFFUSE – 10° - 25° - 40°	-	-	2700K 3000K 4000K

Model	Description	Dimensions 310 x 40 x 52mm
	<p>On-wall/ceiling steel Led light body. Number 4 Led mounted on swivel heads in every 20° directions independently. It is provided with 25cm bipolar cable for the electrical connection.</p> <p>Indoor installation on any plane rigid surface. Fixing by two screws not supplied by us. Finish: black varnished – customized RAL varnished</p>	  310x40x52

<p><b>Series electrical connection 350mA SELV.</b> Polarity: <b>Red cable + Black cable -</b></p> 	<p><b>Connection:</b> connector compliant with EN 60998-2-1 standards</p> <p>(FACSIMILE)</p> 
--	--

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

<p><b>Compliant with European standards</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))</p>	<p><b>CLASSE III</b> Operating with SELV</p>	<p><b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 350mA constant current</p>	<p>Separate waste collection of electric and electronic equipment</p>	<p><b>Made in Italy</b> Projected, manufactured and assembled in Italy</p>
--	--	--	---	--