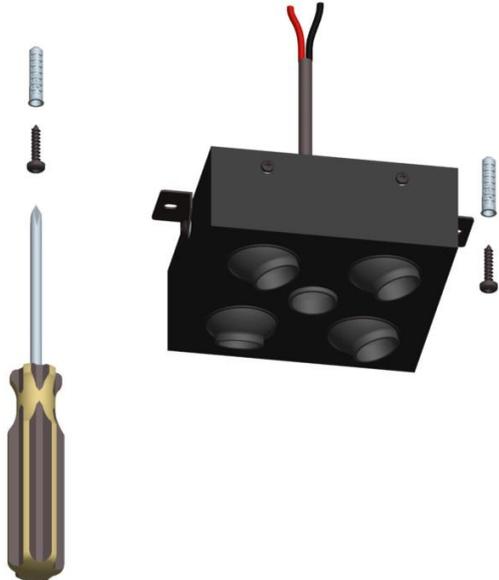


N° LED	W	Lm to the light source				R / V / B		
05	6	550	350mA	IP20	10° - 12° - 35°	-	-	2700K 3000K 4000K

Model	Description	Assembly	Dimensions 140 x 110 x 52mm
	<p>Ceiling steel Led light body. N°4 led mounted on swivel heads in every 20° directions independently, plus 1 central Led light not directable. Finish: black varnished, other colors on request. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any plane rigid surface. Fixing by two screws suitable to the support not supplied by us.</p>		 140x110x52

<p>Series electrical connection 350mA. POLARITY : RED cable + BLACK cable -</p>	<p>Connection: connector compliant with EN 60998-2-1 standards</p>
	<p>(FACSIMILE)</p> 

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

<p>Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))</p>	<p>CLASS III Operating with SELV</p>	<p>POWER SUPPLY By remote power supply SELV OUTPUT 350mA constant current</p>	<p>Separate waste collection of electric and electronic equipment</p>	<p>Made in Italy Projected, manufactured and assembled in Italy</p>
--	---	--	---	--