BRILLAMENTI®
OFFICINA DELLA LUCE

Museum

MU.NN.040.OTA.FI

N° LED	W	Lm to the light source				R / V / B		
05	6	550	350mA	IP20	DIFFUSE – 10 - 25° - 40°	-	-	2700K 3000K 4000K

Model	Description	Dimensions 140 x 110 x 52 mm
	Ceiling steel Led light body. Number 4 Led mounted on swivel heads in every 20° directions independently, plus 1 central Led light not directable. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any plane rigid surface. Fixing by two screws not supplied by us. Finish: black varnished – customized RAL varnished.	 140x110x52

Series electrical connection 350mA SELV. **Polarity: Red cable + Black cable -**

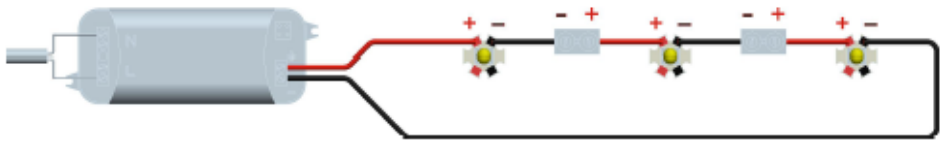

Connection: connector compliant with EN 60998-2-1 standards

(FACSIMILE)

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irremediably damaged.

CE **Compliant with European standards** (EMC, RoHs, Ecodesign and requirements specified in the Low Voltage Directive (LVD)	**CLASSE III** Operating with SELV	**POWER SUPPLY** By remote power supply SELV OUTPUT 350mA constant current	**Separate waste collection of electric and electronic equipment**	**Made in Italy** Projected, manufactured and assembled in Italy

HI Project Srl *Via Mario Luciani 4/E - 32032 Feltre (BL)* *Tel. 0439 310098* *info@hiproject.it* *www.brillamenti.it* *CF - PI e n. isc. reg. imprese 00967030255*