


Reanuzza

RE.NN.020.OTA.FI



Designers Francesco Mattini & Fabio Dolso


N° LED	w	Lm to the light source	-A-	٥٥	4	R/V/B			
3	27	3180	500mA	IP65 in the illuminating part	20° - 35° - 50°	-	2700K	3000K	4000K

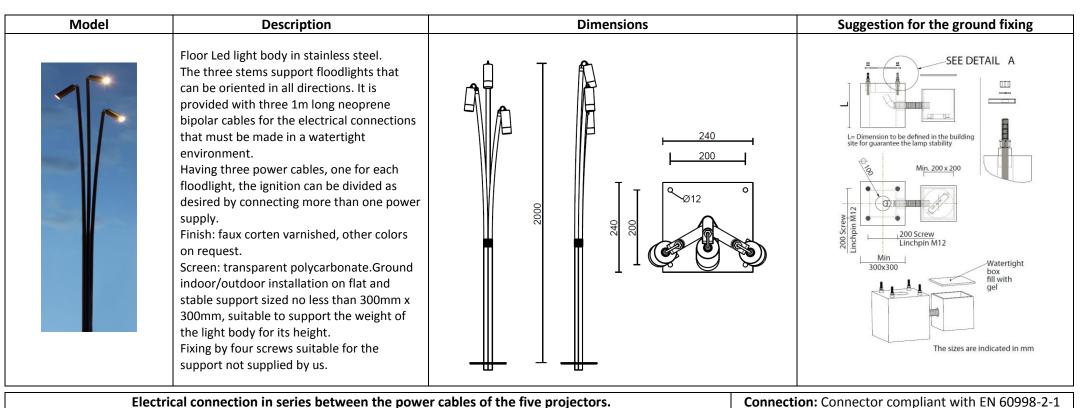

Electrical connection in series between the power cables of the five projectors.

Power supply by remote IP67 SELV power supply if placed outdoors. Polarity: BROWN cable + BLU cable -





IP68 connector for example Steab Paguro 5664 or similar

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irremediably damaged.



Compliant with European standards

(EMC, RoHs, Ecodesign and requirements specified in the Low Voltage Directive (LVD)

CLASSE III Operating with SELV

POWER SUPPLY By remote power supply SELV OUTPUT 500mA



Separate waste collection of electric and electronic equipment

Made in Italy Projected, manufactured and assembled