




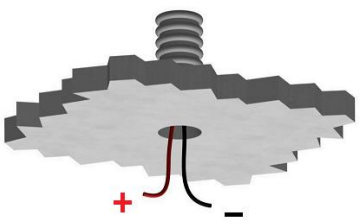

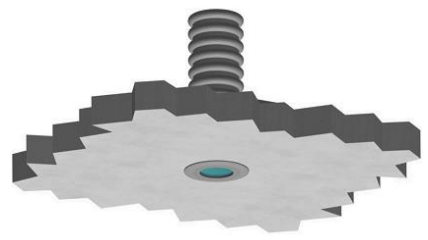
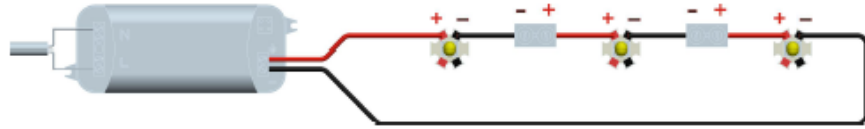



N° LED	W	Lm alla sorgente luminosa				R / V / B		
01	1.2	110	350mA	IP20	DIFFUSA	-	-	2700K 3000K 4000K

Model	Description	Dimensions Ø28 x 13mm	Formwork for fixing Ø25X60mm	Fixing hole Ø22mm
	Ceiling recessed Led light body in aluminum. Finish: grey anodized aluminum, other colors on request. Screen: opal polycarbonate. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any rigid surface. Pressure fixing on 22mm diameter compartment, minimum depth 16mm.			 Hole Ø 22 mm

		
Drill the hole Ø22mm	Carry out the electrical connection respecting the cables polarity. Insert in position.	Final result

Series electrical connection 350mA SELV. POLARITY: <b>RED cable +</b> <b>BLACK cable -</b>	Connection: Connector compliant with EN 60998-2-1 standards.
	(FACSIMILE) 

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irremediably damaged.

 <b>Compliant with European standards</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASS III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 350mA constant current	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
--	---	--	---	--