








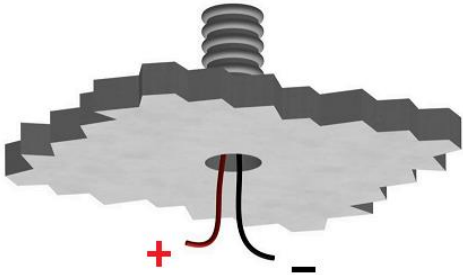
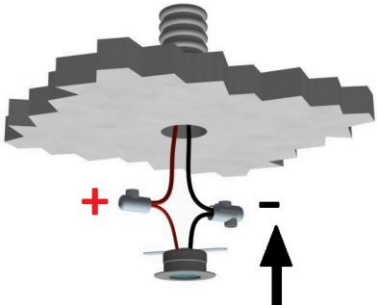
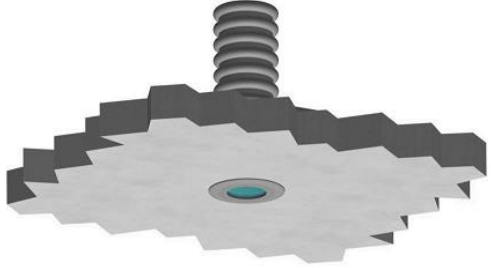
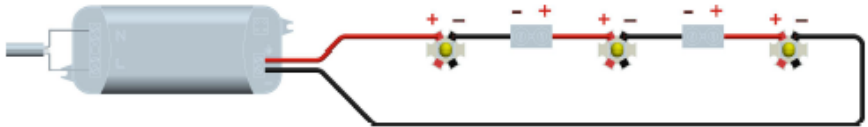



N° LED	W	Lm to the light source				R / V / B		
01	1.2	110	350mA	IP20	7° - 25° - 40°	-	-	2700K 3000K 4000K

Model	Description	Dimensions Ø28 x 18mm	Formwork for fixing Ø25X60mm	Fixing hole Ø22mm
	Ceiling recessed Led light body in aluminum. Finish: grey anodized aluminum, other colors on request. Screen: transparent polycarbonate. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any rigid surface. Pressure fixing on 22mm diameter compartment, minimum depth 22mm.			 Hole Ø 22 mm

		
Drill the hole Ø22mm	Carry out the electrical connection respecting the cables polarity. Insert in position.	Final result

Series electrical connection 350mA SELV. POLARITY: RED cable + BLACK cable -	Connection: Connector compliant with EN 60998-2-1 standards.
	(FACSIMILE) 

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

CE Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	CLASS III Operating with SELV	POWER SUPPLY By remote power supply SELV OUTPUT 350mA constant current	 Separate waste collection of electric and electronic equipment	Made in Italy Projected, manufactured and assembled in Italy
--	---	--	--	--