








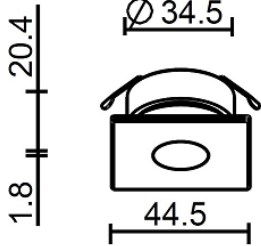

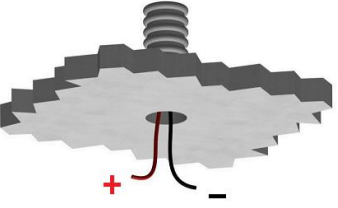
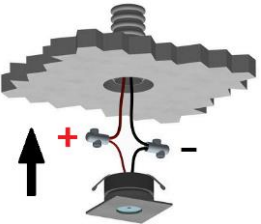
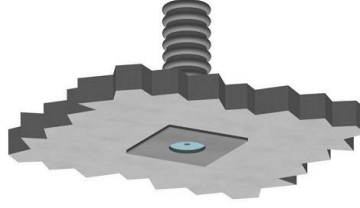






N° LED	W	Lm to the light source				R / V / B		
01	1.2	110	350mA	IP40	DIFFUSE – 7° - 25° - 40°	  		2700K 3000K 4000K
01	4,2	-	350mA	IP40	DIFFUSE - 40°	-	RGBW	- - -

Model	Description	Dimensions 44,5 x 44,5 x 22,5mm	Hole for fixing Ø36mm
	Ceiling recessed Led light body in aluminum. Finish: grey anodized aluminum, other colors on request. Screen: opal/transparent polycarbonate. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any rigid surface. Pressure fixing on 36mm diameter compartment, minimum depth 26mm.		 Hole Ø 36mm

		
Drill the hole Ø36mm	Carry out the electrical connection respecting the polarity. Insert in position	Final result

Series electrical connection 350mA SELV. POLARITY: <b>RED cable +</b> <b>BLACK cable -</b>	Connection: Connector compliant with EN 60998-2-1 standards.	<b>POLARITY RGBW:</b>
	(FACSIMILE) 	WHITE LED (+ = GREY) (- = WHITE) RED LED (+ = BLACK) (- = RED) GREEN LED (+ = TRANSPARENT) (- = GREEN) BLUE LED (+ = BROWN) (- = BLUE)-

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

 <b>Compliant with European standards</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASS III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 350mA constant current. For 350mA RGB please see the pilot module power supply.	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
--	---	--	---	--