




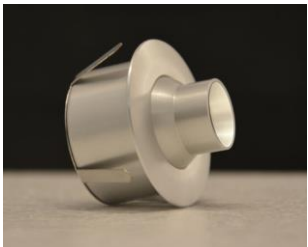
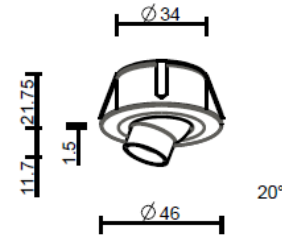

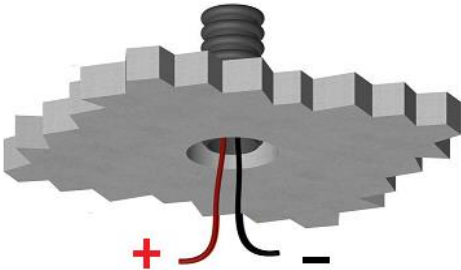
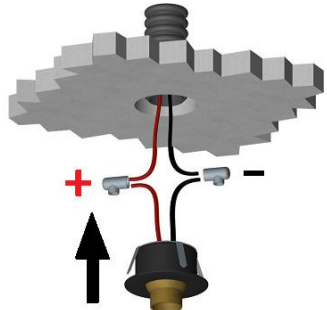

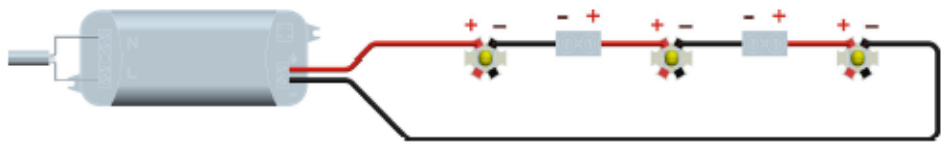



N° LED	W	Lm to the light source				R / V / B		
01	1,2	110	350mA	IP20	7° - 25° - 40°	-	-	2700K 3000K 4000K

Model	Description	Dimensions Ø46 x 35mm	Hole for fixing Ø36mm
	<p>Ceiling recessed Led light body in aluminum. The light source is recessed to improve the visual comfort. Finish: silver grey/black anodized aluminum.</p> <p>Diameter of the visible ferrule 46mm, 20° vertical orientation beam light in every directions. Screen: transparent polycarbonate.</p> <p>It is provided with 25cm bipolar cable for the electrical connection.</p> <p>Indoor installation on any rigid surface.</p> <p>Pressure fixing on 36mm diameter compartment, depth 30mm.</p>		 Hole Ø 36mm

		
Drill the hole Ø36mm	Carry out the electrical connection respecting the polarity. Insert in position.	Final result

Series electrical connection 350mA SELV. POLARITY: RED cable + BLACK cable -	Connection: Connector compliant with EN 60998-2-1 standards.
	(FACSIMILE) 

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

CE Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	CLASS III Operating with SELV	POWER SUPPLY By remote power supply SELV OUTPUT 350mA constant current.	 Separate waste collection of electric and electronic equipment	Made in Italy Projected, manufactured and assembled in Italy
--	---	---	--	--