








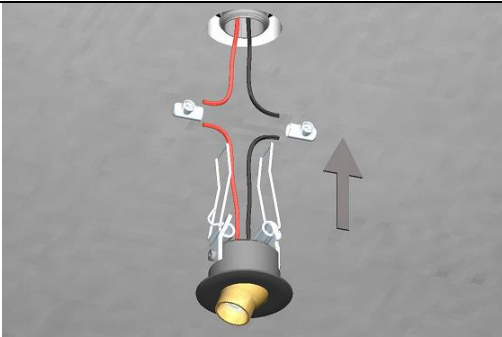

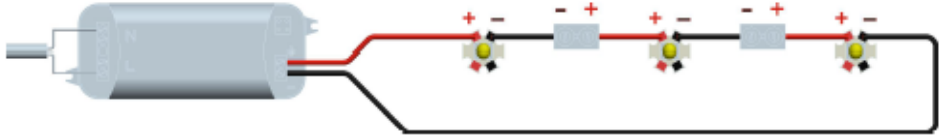




N° LED	W	Lm alla sorgente luminosa				R / V / B		
01	1,2	110	350mA	IP20	7° - 25° - 40°	-	-	2700K 3000K 4000K

Model	Description	Dimensions Ø 46 x 54mm	Hole for fixing Ø38mm
	Ceiling recessed Led light body in aluminum. The light source is recessed to improve the visual comfort. Finish: silver grey/black anodized aluminum. Diameter of the visible ferrule 46mm, 20° vertical orientation beam light in every directions. Screen: transparent polycarbonate. It is provided with 25 cm bipolar cable for the electrical connection. Indoor installation on any rigid surface, fixing with torsion springs on 38mm diameter compartment, depth 50 mm.		 Hole Ø38mm

		
Drill the hole Ø38mm	Carry out the electrical connection respecting the polarity. Insert in position.	Final result

Series electrical connection 350mA SELV. POLARITY: RED cable + BLACK cable -	Connection: Connector compliant with EN 60998-2-1 standards.
	

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

CE (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	CLASS III Operating with SELV	POWER SUPPLY By remote power supply SELV OUTPUT 350mA constant current.	 Separate waste collection of electric and electronic equipment	Made in Italy Projected, manufactured and assembled in Italy
HI Project Srl Via Mario Luciani 4/E - 32032 Feltre (BL)	Tel. 0439 310098	info@hiproject.it	www.brillamenti.it	CF - PI e n. isc. reg. imprese 00967030255