






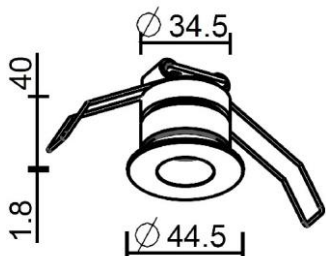

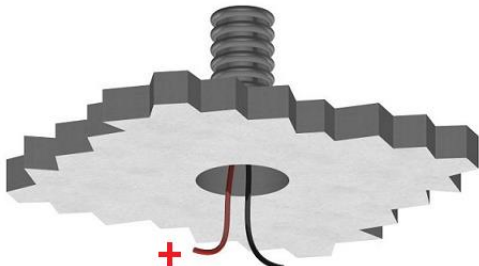
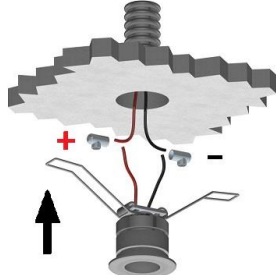
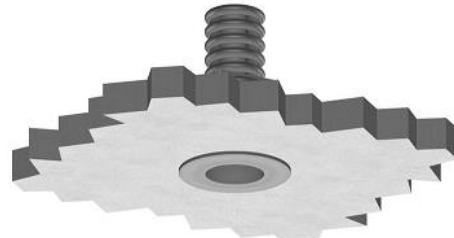
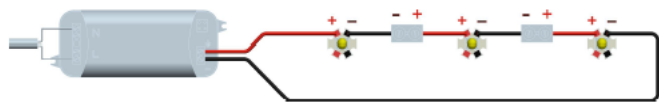





N° LED	W	Lm to the light source				R / V / B		
01	1,2	110	350mA	IP40	DIFFUSE - 7° - 25° - 40°		-	2700K 3000K 4000K
01	4,2	-	350mA	IP40	DIFFUSE - 40°	-	RGBW	-

Model	Description	Dimensions Ø44,5 x 42mm	Hole for fixing Ø36mm
	Ceiling recessed Led light body in aluminum. 11mm backward light source. Finish: silver grey anodized aluminum, other colors on request. Screen: opal/transparent polycarbonate. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any rigid surface. Fixing with torsion springs on 36mm diameter compartment, 50mm depth.		 Hole Ø36mm

		
Drill the hole Ø36mm	Carry out the electrical connection respecting the polarity. Insert in position	Final result

Series electrical connection 350mA SELV. POLARITY: <b>RED cable +</b> <b>BLACK cable -</b>	Connection: Connector compliant with EN 60998-2-1 standards.	POLARITY RGBW:
	(FACSIMILE) 	<b>WHITE LED</b> (+ = GREY) (- = WHITE) <b>RED LED</b> (+ = BLACK) (- = RED) <b>GREEN LED</b> (+ = TRANSPARENT) (- = GREEN) <b>BLUE LED</b> (+ = BROWN) (- = BLUE)

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

 <b>Compliant with European standards</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASS III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 350mA constant current. For 350mA RGB please see the pilot module power supply.	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
--	---	--	--	--