








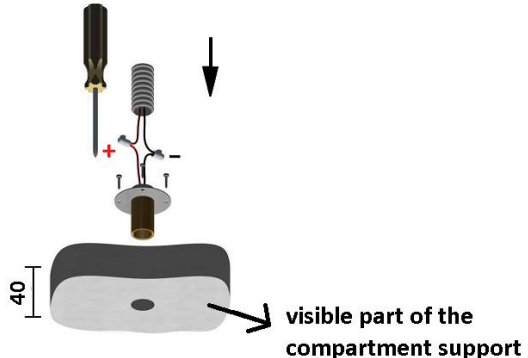

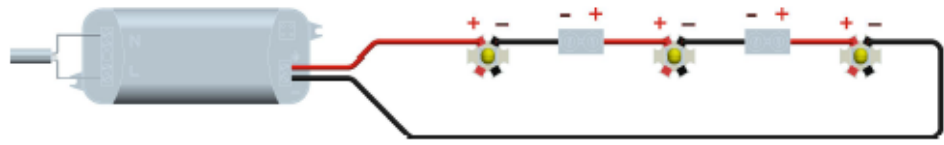



N° LED	W	Lm to the light source				R / V / B		
01	1.2	110	350mA	IP40	DIFFUSE – 7° - 25° - 40°	-	-	2700K 3000K 4000K

Model	Description	Dimensions Ø60 x 55 mm	Hole for fixing Ø 25mm
	Recessed and hidden Led light body in aluminum. Finish: anodized aluminum, on request other materials/finishes for visible part. Screen: transparent polycarbonate. Indoor installation on any rigid material with 40mm thickness. Assembly: the light body must be inserted from the side opposite the visible part of the compartment support, fixing with two screws not supplied by us.		 Hole Ø 25 mm

	 visible part of the compartment support	
Drill the hole Ø25mm	Carry out the electrical connection respecting the polarity. Insert in position.	Final result

Series electrical connection 350mA SELV. POLARITY: <b>RED cable +</b> <b>BLACK cable -</b>	Connection: Connector compliant with EN 60998-2-1 standards.
	(FACSIMILE) 

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

<b>CE</b> Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASS III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 350mA constant current.	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
--	---	---	---	--