







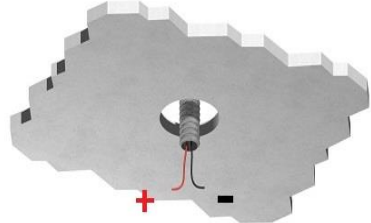
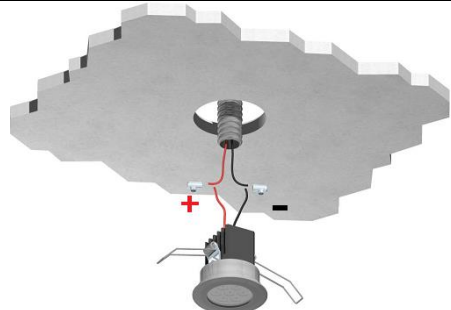
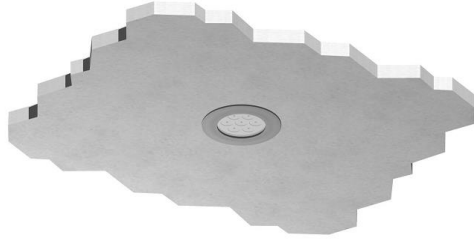
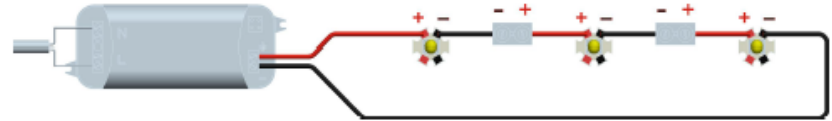





N° LED	W	Lm to the light source				R / V / B		
01	9	1060	500mA	IP40	20° - 35° - 50°	-	-	2700K 3000K 4000K

Model	Description	Dimensions Ø 72x65mm	Hole for fixing Ø65mm
	Ceiling recessed Led light body in aluminum. Finish: silver grey anodized aluminum, other finishes on request. Screen: transparent polycarbonate. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any rigid surface. Fixing with torsion springs on 64mm diameter compartment, depth 75mm.		 Hole Ø 65 mm

		
Drill the hole Ø65mm	Carry out the electrical connection respecting the polarity and insert the spotlight in position	Final result

Series electrical connection 350mA-500mA SELV. POLARITY: <b>RED cable +</b> <b>BLACK cable -</b>	Connection: Connector compliant with EN 60998-2-1 standards
	

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

 <b>Compliant with European standards</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASS III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 350mA - 500mA constant current.	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
<b>HI Project Srl</b> Via Mario Luciani 4/E - 32032 Feltre (BL) Tel. 0439 310098 <a href="mailto:info@hiproject.it">info@hiproject.it</a> <a href="http://www.brillamenti.it">www.brillamenti.it</a> CF - PI e n. isc. reg. imprese 00967030255				