


## UFO Mini UF.NN.000.OTA.FI



N° LED	W	<b>Lm</b> to the light source	-A-	٥٥	<u> </u>	R/V/B		
01	1.2	110	350mA	IP65	DIFFUSE	• • •	-	2700K 3000K 4000K



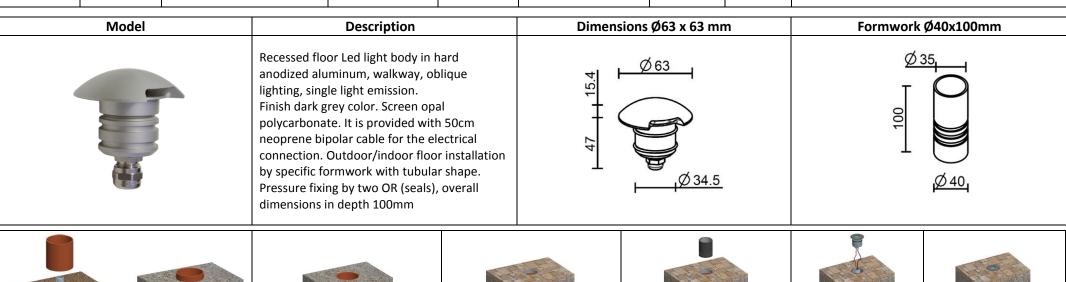



RECOMMENDED: Cut the tube on the support surface of the flooring



Make the flooring and drill the floor Ø41-42mm at the predetermined size



Insert and glue the formwork into the floor with suitable adhesive for the purpose




Connect the spotlight to the electrical system in a watertight way



Spread a light film of oil in the formwork and insert the spotlight.





**Connection**: Connector compliant with EN 60998



IP 68 connector or similar Steab Paguro 5664

**ATTENTION**: Before starting the electrical connections, make sure that the power supply is not powered. Failure to respect this simple rule irreparably compromises the light source.



**Compliant with European standards** (EMC, RoHs, Ecodesign and requirements specified in the Low Voltage Directive (LVD))

CLASS III Operating with SELV

**POWER SUPPLY** By remote power supply SELV OUTPUT 350mA constant current



Separate waste collection of electric and electronic

Made in Italy Projected, manufactured and assembled in Italy

HI Project Srl Via Mario Luciani 4/E - 32032 Feltre (BL)

Tel. 0439 310098

info@hiproject.it

www.brillamenti.it