







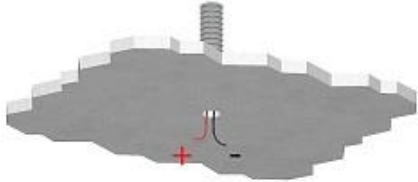







N° LED	W	Lm to the light source				R / V / B		
01	9	1060	500mA	IP54	DIFFUSE - 20° - 35° - 50°	-	-	2700K 3000K 4000K

Model	Description	Dimensions Ø 60x120mm	Fixing rosette Ø70mm
	Wall/ceiling Led floodlight in aluminum. Finish: white Ral 9016 varnished, other colors on request. Screen: transparent polycarbonate. It is provided with 25cm cable for the electrical connection. Indoor installation with rosette. Fixing by two screws suitable to the support not supplied by us.		

			
Make sure that the power supply cables are connected to the remote power supply	Carry out the electrical connection respecting the polarity	Fix the light body to the support with countersunk screws maximum diameter 5mm, suitable to the support	Final result

<p><b>Series electrical connection 350mA – 500mA SELV.</b></p> <p><b>Polarity: RED cable + BLACK cable -</b></p>	<p><b>Connection:</b></p> <p>Connector compliant with EN 60998-2-1 standards</p>
	

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

	<p><b>Compliant with European standards</b></p> <p>(EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))</p>	<p><b>CLASS III</b></p> <p>Operating with SELV</p>	<p><b>POWER SUPPLY</b></p> <p>By remote power supply SELV OUTPUT 350mA/500mA constant current</p>	 <p>Separate waste collection of electric and electronic equipment</p>	<p><b>Made in Italy</b></p> <p>Projected, manufactured and assembled in Italy</p>
---	---	--	---	---	---