
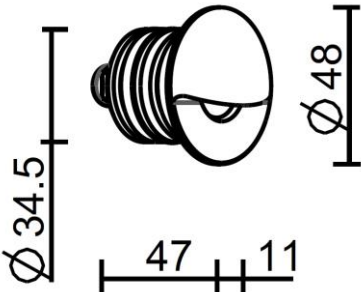
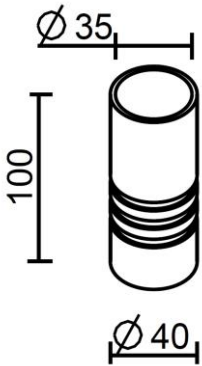
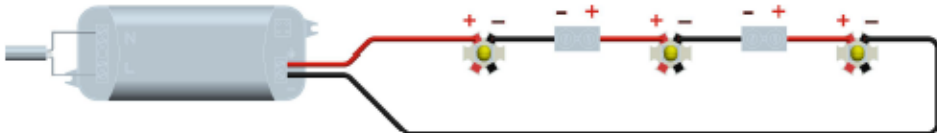





N° LED	W	Lm to the light source				R / V / B		
01	1.2	110	350mA	IP65	DIFFUSE	  	-	2700K 3000K 4000K

Model	Description	Dimensions Ø48 x 58mm	Fixing formwork Ø40 x 100mm
	<p>Recessed wall/ceiling Led light body in aluminum, anti-blinding light with 45° emission.</p> <p>It is provided with 50cm neoprene bipolar cable for the electrical connection.</p> <p>Outdoor installation on any rigid surface by specific formworks.</p> <p>Pressure fixing by snap ring, depth dimension 100mm.</p> <p>FINISH: BLACK / GREY ANODIZED ALUMINUM – GALVANIZED NICKEL – CUSTOMIZED RAL VARNISHED</p> <p>SCREEN: TRANSPARENT POLYCARBONATE</p>		

Series electrical connection 350mA SELV.		Polarity: Red cable + Black cable –		Connection to be made in a watertight place: connector compliant with EN 60998-2-1 standards	
				 IP68 connector for example Steab Paguro 5664 or similar	
ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.					
 Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))		CLASSE III Operating with SELV	POWER SUPPLY By remote power supply SELV OUTPUT 350mA constant current	 Separate waste collection of electric and electronic equipment	Made in Italy Projected, manufactured and assembled in Italy
HI Project Srl Via Mario Luciani 4/E - 32032 Feltre (BL)		Tel. 0439 310098		info@hiproject.it	
		www.brillamenti.it		CF - PI e n. isc. reg. imprese 00967030255	