







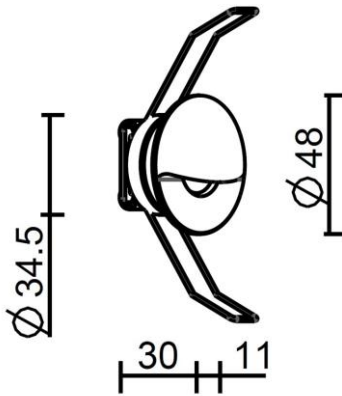

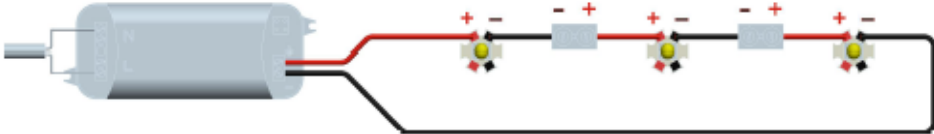



N° LED	W	Lm to the light source				R / V / B		
01	1.2	110	350mA	IP40	DIFFUSE	  	-	2700K 3000K 4000K

Model	Description	Dimensions Ø48 x 41mm	Fixing hole Ø35mm
	Recessed wall/ceiling Led light body in aluminum, anti-blinding light with 45° emission. It is provided with 50cm neoprene bipolar cable for the electrical connection. Finish: silver grey anodized, other finishes on request. Screen: transparent polycarbonate. Indoor installation on any rigid surface with hole 35mm diameter. Fixing by two torsion springs, depth dimension 100 mm.		 Hole Ø 35 mm

<b>Series electrical connection 350mA SELV. POLARITY:</b> <b>RED cable + BLACK cable -</b>	<b>Connection:</b> Connector compliant with EN 60998-2-1 standards.
	 (FACSIMILE)

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

<b>Compliant with European standards</b> <small>(EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))</small>	<b>CLASS III</b> <small>Operating with SELV</small>	<b>POWER SUPPLY</b> <small>By remote power supply SELV OUTPUT 350mA constant current</small>	 <small>Separate waste collection of electric and electronic equipment</small>	<b>Made in Italy</b> <small>Projected, manufactured and assembled in Italy</small>
<b>HI Project Srl</b> Via Mario Luciani 4/E - 32032 Feltre (BL)		Tel. 0439 310098	<a href="mailto:info@hiproject.it">info@hiproject.it</a>	<a href="http://www.brillamenti.it">www.brillamenti.it</a>
CF - PI e n. isc. reg. imprese 00967030255				