










N° LED mt	W/mt	Lm ca				R / V / B		
480	40	1420	24 V	IP40	DIFFUSE	-	-	3000K 4000K 6000K

Model	Description	With steel carrier cable and woven supply cable	With "transparent" supply carrier cable
	<p>ZCANDLE aluminum and methacrylate led lighting body, suspension and ceiling, n° 480 led/mt, consumption 40 watt/mt., power supply 24 Volt, colour temperature warm white 2850-3100K, 1420 Lm/mt., diffuse optics.</p> <p>Nickel polished finishing in the aluminum and metal part, white opal tubular diffuser in polycarbonate. Protection degree IP40.</p> <p>Equipped with 2 mt woven covered (black or red) cable for the electrical connection and steel cable.</p> <p>As an alternative, single "transparent" cable.</p> <p>Maximum dimensions: Ø60mm, maximum length 2000mm.</p> <p>Installation, indoor on every rigid surface.</p> <p>Mounting with rosette, fixing with two screws visible on the rosette.</p>		

Electrical connection in parallel 24V

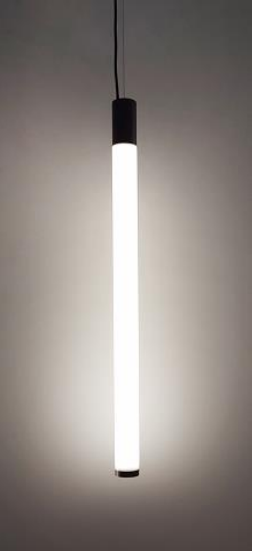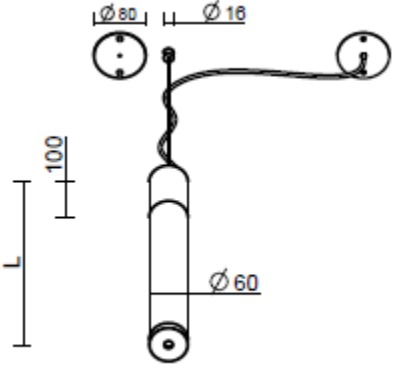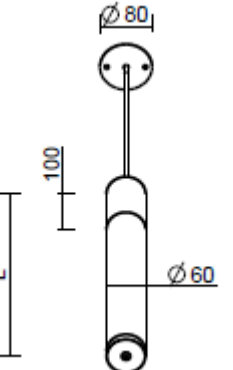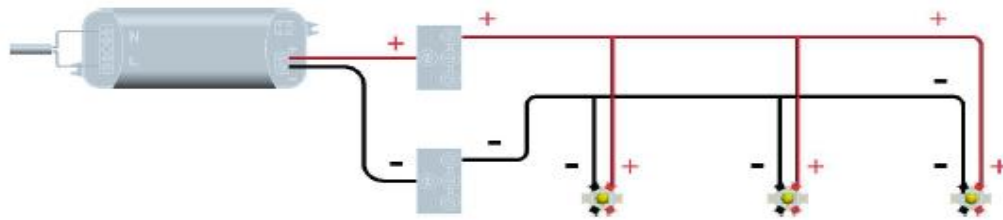

Before starting electrical connection remove mains voltage and do all the connections.

CE In conformity with European legislations EN 60598-1 and directive 2002/95/CE (RoHS)	III Class III (devices supplied with tension lower than 50v). Excluding the grounding system	M Suitable to be inserted in furniture	F Suitable to be mounted on normally flammable surfaced	Made in Italy Projected, manufactured and assembled in Italy
--	--	--	---	--