




N° LED/mt	W/mt	Lm/mt to the light source				R / V / B		
480	40	2700	24V	IP20	DIFFUSE	-	-	2700K 3000K 4000K

Model	Description	Define the position and carry out the electrical connection respecting the polarity.	Define the height of the suspension from the ceiling and lock the cable clamp on the power cord. Fix the rosette to the ceiling with the screws.	Final result
	<p>Ceiling hanging Led light body in aluminum and methacrylate. Finish: metallic parts black varnished. Other colors/finishes on request. Screen: white opal methacrylate. It is provided with 2m "transparent" cable for the connection to the power grid 24V with inside a steel cable for the suspension.</p> <p>Indoor installation on any rigid surface. Assembly with rosette, fixing with two visible screws suitable to the support, not supplied by us. Maximum length of the lamp 2000mm.</p>			

Parallel electrical connection 24V. Polarity: Red cable + Black cable -

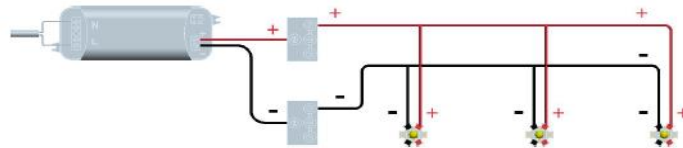

Connection:
connector compliant with EN 60998-2-1 standards

(FACSIMILE)



ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged..



Compliant with European standards
(EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))

CLASS III
Operating with SELV

POWER SUPPLY
By remote power supply SELV OUTPUT 24Volt constant voltage



Separate waste collection of electric and electronic equipment

Made in Italy
Projected, manufactured and assembled in Italy