


BRILLAMENTI



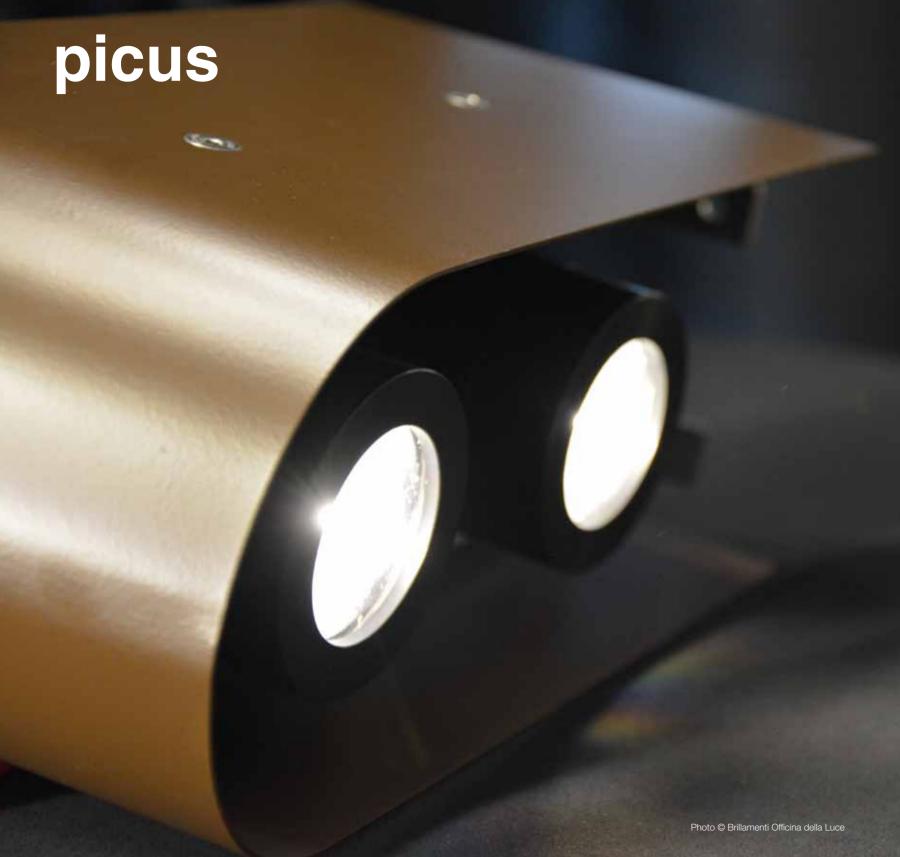

Picus

PC.NN.000.OTA.FI - PC.NN.000.OTA.FI



N° LED	w	Lm ca	- A -	٥٥	<u> </u>	R/V/B		
↓01 ↓01	2,4 2,4	180 180	700mA	IP 65	3°	•••	-	2700 K 3000 K 4000 K

On-wall Led light body with two steel and aluminum floodlights. Independent regulation of the inclination of the two projectors. It is provided with 50cm cable for the electrical connection.

Outdoor installation on any rigid surface.

Fixing by four screws not supplied by us.

FINISH: FAUX CORTEN VARNISHED - CUSTOMIZED RAL

SCREEN: TRANSPARENT POLYCARBONATE

BRILLAMENTI