







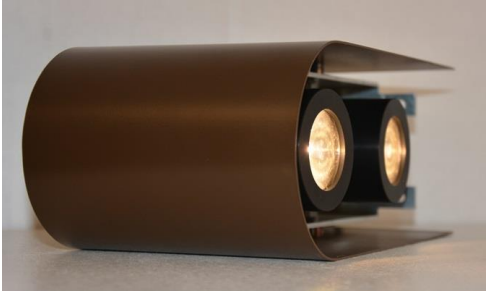











N° LED	W	Lm to the light source				R / V / B		
↓1	2.4	180	500mA	IP65	3°	  	-	2700K 3000K 4000K
↓1	2.4	180						

Model	Description	Dimensions 265mmx103mmx140mm
	On-wall Led light body with two floodlights, in steel and aluminum. Screen: transparent polycarbonate. Independent regulation of the inclination of the two projectors. Finish: faux corten varnished, other colors on request. It is provided with 50cm cable for the electrical connection. Outdoor installation on any rigid surface. Fixing by four screws suitable for the support, not supplied by us.	 265x103x140

			
Lighting body fixing on a rigid flat surface and carry out the electrical connection	Adjust in a correct position the lighting bodies	Mounting the outside metal cover	Final result

Series electrical connection 500mA SELV. POLARITY: RED cable + BLACK cable -	Connection: Connector compliant with EN 60998-2-1 standards
	 (FACSIMILE) IP68 connector for example Steab Paguro 5664 or similar

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

 <b>Compliant with European standards</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASSE III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 500mA constant current	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
---	--	--	--	--