








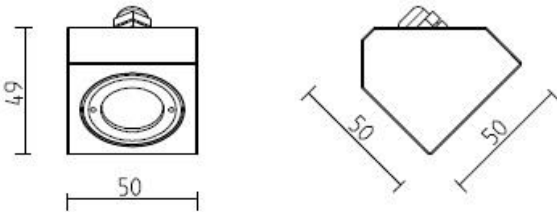




N° LED	W	Lm to the light source				R / V / B		
01	1.2	110	350mA	IP65	DIFFUSE – 7° - 25° - 40°	  	-	2700K 3000K 4000K

Model	Description	Dimensions
	Free-standing aluminum Led lighting body. 45° beam angle. It is provided with 25cm bipolar cable for the electrical connection. Installation on any rigid surface, fixing by screws on specific placement.	

Electrical series connection in 350mA SELV. Polarity: <b>Red cable +</b> <b>black cable -</b>	Connection to be made in a watertight place: connector compliant with EN 60998-2-1 standards	Mounting
	(FACSIMILE)  IP68 connector for example Steab Paguro 5664 or similar	

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

 <b>Compliant with European standards</b> (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASSE III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 350mA constant current	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
<b>HI Project Srl</b> Via Mario Luciani 4/E - 32032 Feltre (BL)	Tel. 0439 310098	<a href="mailto:info@hiproject.it">info@hiproject.it</a>	<a href="http://www.brillamenti.it">www.brillamenti.it</a>	CF - PI e n. isc. reg. imprese 00967030255