












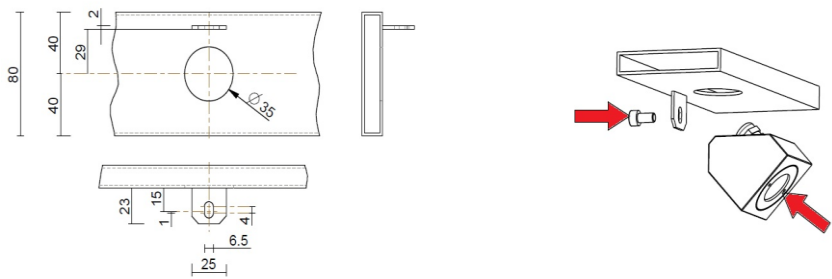
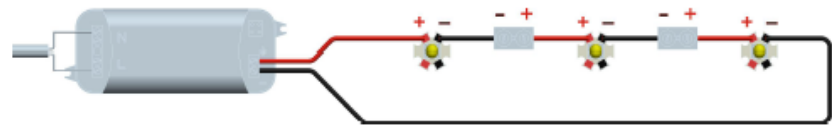





N° LED	W	Lm to the light source				R / V / B		
01	1.2	110	350mA	IP65	7° - 25° - 40°	  	-	2700K 3000K 4000K

Model	Description	Dimensions
	Free-standing aluminum Led lighting body. Beam angle inclined 45 ° with respect to the fixing surface. Finish: black anodized aluminum – other colors on request. Thick transparent polycarbonate screen. It is provided with 25cm bipolar cable for the electrical connection. Installation on any rigid surface, fixing by M6 screw not supplied by us.	 

Assembly on a bracket		Assembly on a handrail
Cod. STA_50_37_65  50x37x65		
Electrical series connection in 350mA SELV		Connection to be made in a watertight place
		 <p>IP68 connector for example Steab Paguro 5664 or similar compliant with EN 60998-2-1 standards</p>
ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.		

 Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	CLASSE III Operating with SELV	POWER SUPPLY By remote power supply SELV OUTPUT 350mA constant current	 Separate waste collection of electric and electronic equipment	Made in Italy Projected, manufactured and assembled in Italy
HI Project Srl Via Mario Luciani 4/E - 32032 Feltre (BL)		Tel. 0439 310098	info@hiproject.it	www.brillamenti.it
CF - PI e n. isc. reg. imprese 00967030255				