


LOTO


LO.NN.F50.OTA.FI



N° LED	w	Lm to the light source	(A)	٥٥	<u>A</u>	R/V/B		
01	1.2	110	350mA	IP65	DIFFUSE – 7° - 25° - 40°	-	-	2700K 3000K 4000K

Model	Description	Dimensions Ø48 x 100 mm	Hole for fixing Ø 46mm
	Led light body in stainless steel, recessed and flush with the floor by specific formwork. Finish: stainless steel and aluminum, other materials on request. Dimensions: Ø35mm x 40mm, screen: transparent polycarbonate. Metal cable gland. It is provided with 20 cm neoprene bipolar cable for the electrical connection. The spotlight is supplied complete with aluminum formwork. Formwork dimensions: Ø diameter in view 48mm, Ø internal diameter 35mm, length 100 mm. Wooden floor installation thickness 10mm, screw assembly on a hole Ø 46mm. Depth dimension 100mm. Thick protective screen with pressure insertion on a sealing OR.		Hole Ø 46 mm

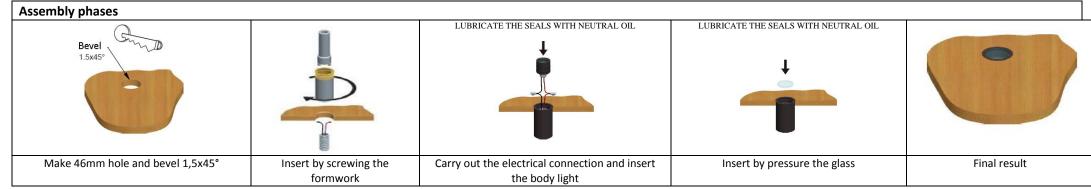

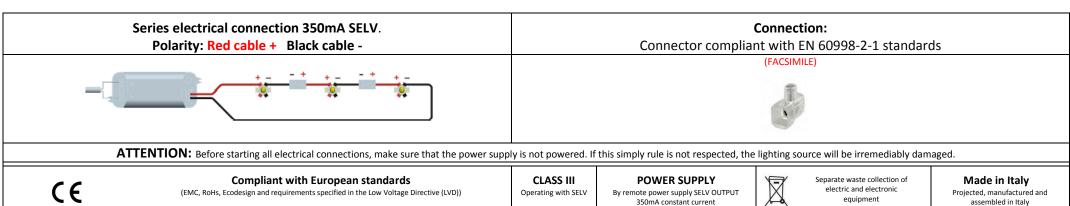

info@hiproject.it

www.brillamenti.it

CF - PI e n. isc. reg. imprese 00967030255