


N° LED	W	Lm to the light source				R / V / B		
14	2	200	24V	IP20	DIFFUSE	-	-	2700K 3000K 4000K

DESCRIPTION: Recessed wall Led light body in steel, suitable for application as steplight. Diffuse optics inclined 10° downwards. Finish: white ral 9016 varnished, other colors on request. Screen: sandblast polycarbonate. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on drywall, assembly with torsion springs.

Model	Dimensions	INSTALLATION		
	<p>125x60x35mm</p>			
		Carry out the seat housing on drywall 120x30mm	Carry out the electrical connection and install the lighting body	Final result

Parallel electrical connection 24V Polarity: RED cable + BLACK cable -

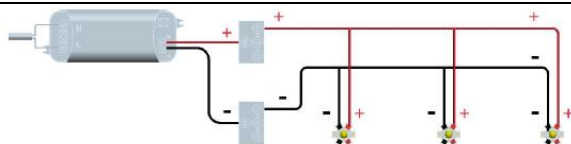

Connection:

Connector compliant with EN 60998-2-1 standards

(FACSIMILE)



ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simple rule is not respected, the lighting source will be irretrievably damaged.



Compliant with European standards
(EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))

CLASS III
Operating with SELV

POWER SUPPLY
By remote power supply SELV OUTPUT 24V constant voltage



Separate waste collection of electric and electronic equipment

Made in Italy
Projected, manufactured and assembled in Italy