





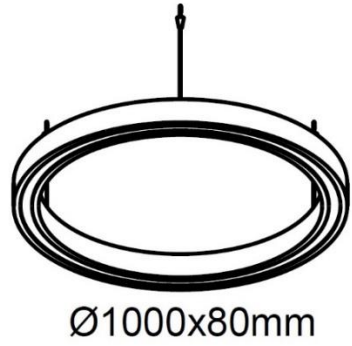




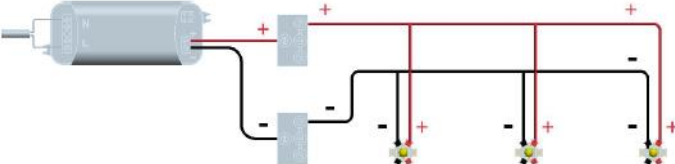





N° LED / mt	W / mt	Lm to the light source				R / V / B		
128	23	8500 ca.	24V	IP40	DIFFUSE	-	-	2700K 3000K 4000K

Model	Description	Dimensions Ø ext.1000mm Ø int.850mm x80mm
	<p>Ceiling hanging Led light body, aluminum and wood frame. Finish: white ral 9016 varnished wood, other colors on request, diffuser screen: opal white methacrylate. Circle diameter 1000mm.</p> <p>It is provided with 2m bipolar cable covered in white/ grey color streaked tissue for the electrical connection.</p> <p>Indoor suspension installation on any rigid surface with specific steel cables included in the supply. Assembly with rapid couplings fixed on the ceiling by screws not supplied by us.</p>	

			
Define the position of the cables and fix the cables support to the ceiling		Rapid coupling assembly. Do the electrical connection.	

<b>Parallel electrical connection 12V / 24V. Polarity: Red cable + Black cable -</b>	<b>Connection:</b> connector compliant with EN 60998-2-1 standards
	

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

 <b>Compliant with European standards</b> <small>(EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))</small>	<b>CLASS III</b> <small>Operating with SELV</small>	<b>POWER SUPPLY</b> <small>By remote power supply SELV OUTPUT 24V constant voltage</small>	 <b>Separate waste collection of electric and electronic equipment</b>	<b>Made in Italy</b> <small>Projected, manufactured and assembled in Italy</small>
--	--	---	---	---