









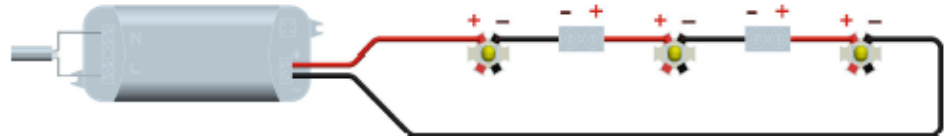



N° LED (double emission)	W	Lm to the light source				R / V / B		
↑03 ↓03	7.2	660	350mA	IP40	DIFFUSE – 7° - 25° - 40°	-	-	2700K 3000K 4000K

Model	Description	Dimensions Ø80x160mm
	On-wall aluminum Led light body. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any rigid surface, fixing by screws.	 Ø80x160

		
Place and secure the support to the wall	Carry out the electrical connection and secure the lighting body to the support	Final result

<b>Series electrical connection 350mA SELV.</b> Polarity: <b>Red cable + Black cable -</b>	<b>Connection:</b> connector compliant with EN 60998-2-1 standards
	(FACSIMILE) 

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

<b>CE</b> Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	<b>CLASSE III</b> Operating with SELV	<b>POWER SUPPLY</b> By remote power supply SELV OUTPUT 350mA constant current	 Separate waste collection of electric and electronic equipment	<b>Made in Italy</b> Projected, manufactured and assembled in Italy
--	--	--	--	--