






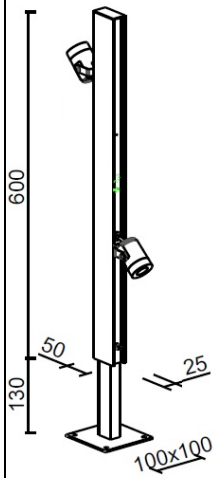








N° LED	W	Lm to the light source				R / V / B		
03+03	6.5	660	350mA	IP65	7° - 25° - 40°		-	2700K 3000K 4000K

MODEL	DESCRIPTION	DIMENSIONS	INSTALLATION			
			PREPARE THE SUPPORT PLANE	CARRY OUT THE ELECTRICAL CONNECTION AND FIX THE LIGHT BODY	ADJUST THE FLOODLIGHT	FINAL RESULT
	<p>Indoor/outdoor Led light body in stainless steel and aluminum with two adjustable Led floodlights.</p> <p>It is provided with two bipolar power supply cable in neoprene, length 1 meter, for the electrical connection.</p> <p>Finish: "faux Corten" varnished, other colors on request.</p> <p>Screen: transparent polycarbonate.</p> <p>The IP65 protection degree is to be understood on the two light sources.</p> <p>Installation on any rigid and flat surface. Fixing by four screws suitable to the support base, not supplied by us.</p> <p>In order to make sure a good functioning and a long lasting of the product the electrical connections must be made in a watertight environment.</p>		 <p>FIX THE SUPPORT</p> 		 	

**Series electrical connection 350mA SELV. POLARITY : RED cable + BLACK cable -**



**Connection: compliant with EN 60998-2-1 standards**



IP68 connector for example Steab Paguro 5664 or similar

**ATTENTION:** Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.



**Compliant with European standards**  
(EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))

**CLASSE III**  
Operating with SELV

**POWER SUPPLY**  
By remote power supply SELV OUTPUT 350mA constant current



Separate waste collection of electric and electronic equipment

**Made in Italy**  
Projected, manufactured and assembled in Italy