

**Picus** 

# PC.NN.000.OTA.FI



**OFFICINA DELLA LUCE** 

| N° LED | w   | Lm<br>to the light<br>source | Luminous<br>efficiency | Chromatic deviation | CRI  | <b>○○</b> IP65                       | $\triangleleft$ | <b>R / V / B</b> | ٩ |                       |
|--------|-----|------------------------------|------------------------|---------------------|------|--------------------------------------|-----------------|------------------|---|-----------------------|
| ↓01    | 2.4 | 160                          | 70 LmW                 | SDCM 2              | > 80 | total protection against the dust    | 3°              | • • •            | - | 2700К – 3000К – 4000К |
| ↓01    | 2.4 | 160                          | 70 LmW                 | SDCM 2              | > 80 | protected against the water splashes | 3°              | • • •            | - | 2700K – 3000K – 4000K |


\*The above data refer to a temperature of 3000K

| Model | Description  | Dimensions 265mmx103mmx140mm |
|-------|--|------------------------------|
|       | On-wall Led light body with two floodlights, in steel and<br>aluminum. Screen: transparent polycarbonate.<br>Independent regulation of the inclination of the two<br>floodlights. Finish: faux corten varnished, other colors on<br>request. It is provided with 50cm cable for the electrical<br>connection. Indoor/ outdoor installation on any rigid<br>surface. Fixing by four screws suitable for the support,<br>not supplied by us. | 265x103x140                  |

| ELECTRICITY SUPPLY: 350mA constant current SELV POWER SUPPLY, not included, remotely placed.   | Connection: Connector compliant withEN 60998-2-1   |                             |  |  |  |  |  |  |  |  |  |  |
|--|--|-----------------------------|--|--|--|--|--|--|--|--|--|--|
| Series electrical connection. POLARITY: RED Cable + BLACK Cable- / / BROWN Cable + light blue CABLE -  | ATTENTION<br>The protection degree of the connection<br>system must be identical or greater than the<br>protection degree of the product. The<br>junction clips are not included. The<br>installation must be carried out by qualified<br>personnel. |                             |  |  |  |  |  |  |  |  |  |  |
| • ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. The connection to the electricity grid must be carried out only after completing the wiring of all the components. If this simply rule is not respected, the lighting source will be irremediably damaged. The installation must be carried out by qualified personnel. |  |                             |  |  |  |  |  |  |  |  |  |  |
| C C Compliant with European standards<br>EMC – RoHS – REACH - Ecodesign LIII III III III III III IIII IIII II  | PERATING TEMPERATURE<br>-20°C +40°C Separate waste collection of electric<br>and electronic equipment Made in Italy Projected, manufactured and assembled in Italy   | Projected, manufactured and |  |  |  |  |  |  |  |  |  |  |
| HI Project SrlVia Mario Luciani 4/E - 32032 Feltre (BL)Tel. 0439 310098  | info@hiproject.it www.brillamenti.it CF - PI e n. isc. reg. imprese 00967030255  |                             |  |  |  |  |  |  |  |  |  |  |



## **INSTALLATION AND USE MANUAL**

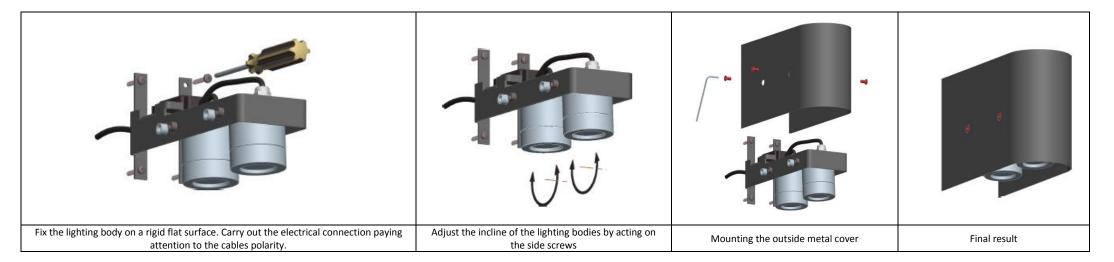

### WARNING AND PROVISIONS

#### ATTENTION!

The appliance safety is guaranteed only by respecting, both during installation and employment phase, of the following instructions. It is therefore necessary to archive the present document.

#### WARNINGS:

- The power supply voltage must be removed during the installation and during any operation.
- The appliance must not be modified or tampered with in any way. Every modification can compromise the safety of the appliance, making it dangerous.

Hi. Project srl refuses any responsibility for modified or tampered with products. Modifications or tampering with the product, if not authorized by the company (Hi. Project s.r.l.), nullify any direct and indirect responsibility of the manufacturer as well as the warranty.

- The appliance is free from the photobiological risk. Please follow the instructions of this data sheet.
- The product is to be considered a "Containing Product" and is not subject to maintenance. The light source can only be replaced by the manufacturer. For further information please contact Hi.Project s.r.l.
- If the flexible power cable is damaged, it can be substituted only by the manufacturer. For further information please contact Hi.Project s.r.l.

• Each product, at the end of its life, must be committed to a waste storage center specialized in electrical and electronic equipment. Alternatively, it can be returned to the manufacturer.

#### WARRANTY CONDITIONS:

Our products are guaranteed for 24 months from the date of purchase. The warranty only covers construction defects attributable to the manufacturer. The warranty does not include all the activities necessary for the product to arrive free port at the manufacturer for repair.


The warranty is void if the malfunction is due to: improper use of the product, tampering, repairs not authorized by Hi. Project S.r.l., negligence of the installer, failure to comply with the product rating plate, damage due to natural causes such as lightning or power surges, use of power supplies or drivers not approved by Hi. Project S.r.l. and/or in any case not compliant with the technical regulations that regulate the European market, damage caused by wrong connections or connections with an IP degree lower than the purchased product, damage caused during the transport (even if the transport is organized by Hi. Project S.r.l. on behalf of the Customer), other causes that are not expressly and unequivocally referred to the defectiveness of the product itself.

#### **PRODUCT CLEANING INSTRUCTIONS**

- To clean the appliance, use exclusively a soft cloth, possibly moistened with water and neutral soap.
- Warning: do not use aggressive cleansers, alcohol or solvents.

The information contained in this document may be changed by Hi.Project s.r.l. at any time without notice and does not imply the assumption, even implicit, of any obligation on the part of Hi. Project Srl.

Hi. Project Srl refuses all responsibility if the installation is not carried out by qualified personnel and in compliance with current regulations.

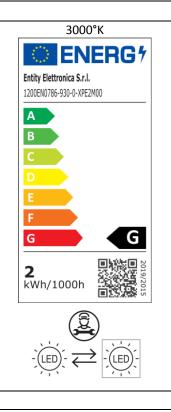

www.brillamenti.it