

Esse


ESA.NNN.CO.A.TO.FS




Designer Lionello Pradegan

N° LED/m	w	W/m	Lm/m to the light source	Luminous efficiency	Chromatic deviation	CRI		<u></u>	R/V/B		
210	36	14.4	1836	>140Lm W	SDCM 3	80	Not protected against the ingress of liquids	Diffuse	1	-	2700K – 3000K – 4000K

The above data refer to a temperature of 3000K

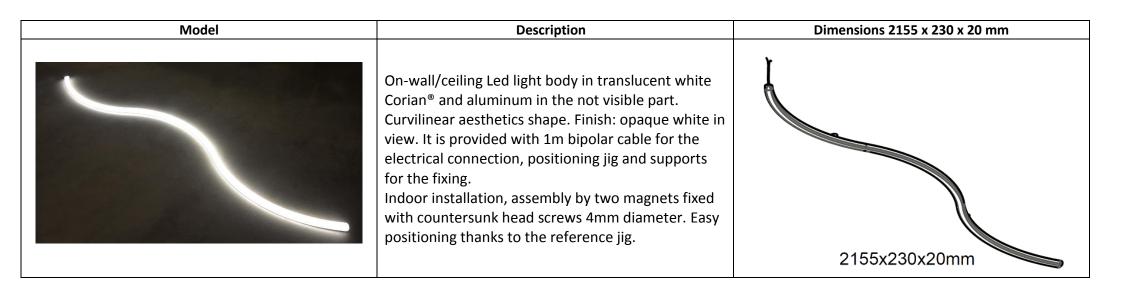

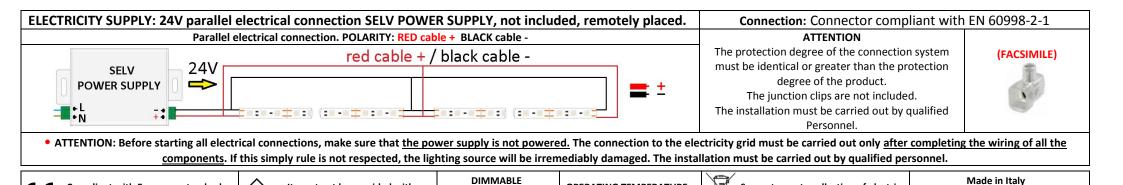

Compliant with European standards

EMC - RoHS - REACH - Ecodesign

It must not be provided with a

electrical ground of protection

By dimmable power

supply

OPERATING TEMPERATURE

-20°C +40°C


Separate waste collection of electric

and electronic equipment

Projected, manufactured and

assembled in Italy

INSTALLATION AND USE MANUAL

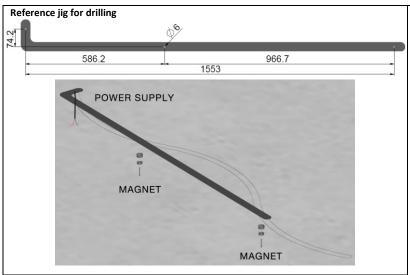

Define the lamp position. Arrange the jig to the wall/ceiling to define position of the electricity supply hole and of the two magnets.


ATTENTION! THE MAGNET MUST NOT BE RECESSED WITH

RESPECT TO THE FLUSH OF THE LAMP SUPPORT SURFACE

info@hiproject.it

Fix the magnets with countersunk screws 40mm.

Electrical connection and Led lighting body assembly

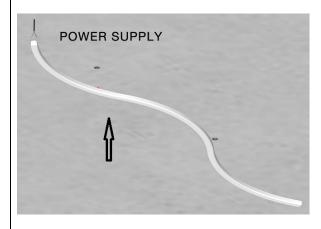

Connect the power cables to the lamp, align and place the lamp supports in the magnets positions.

WARNING AND PROVISIONS

ATTENTION!

The appliance safety is guaranteed only by respecting, both during installation and employment phase, of the following instructions. It is therefore necessary to archive the present document. **WARNINGS:**

- The power supply voltage must be removed during the installation and during any operation.
- The appliance must not be modified or tampered with in any way. Every modification can compromise the safety of the appliance, making it dangerous.

Hi.Project srl refuses any responsibility for modified or tampered with products. Modifications or tampering with the product, if not authorized by the company (Hi.Project s.r.l.), nullify any direct and indirect responsibility of the manufacturer as well as the warranty.

- The appliance is free from the photobiological risk, Please follow the instructions of this data sheet.
- The product is to be considered a "Containing Product" and is not subject to maintenance. The light source can only be replaced by the manufacturer. For further information please contact Hi.Project s.r.l.
- If the flexible power cable is damaged, it can be substituted only by the manufacturer. For further information please contact Hi.Project s.r.l.
- Each product, at the end of its life, must be committed to a waste storage center specialized in electrical and electronic equipment. Alternatively, it can be returned to the manufacturer.

WARRANTY CONDITIONS:

Our products are guaranteed for 24 months from the date of purchase. The warranty only covers construction defects attributable to the manufacturer. The warranty does not include all the activities necessary for the product to arrive free port at the manufacturer for repair.

The warranty is void if the malfunction is due to: improper use of the product, tampering, repairs not authorized by Hi. Project S.r.l., negligence of the installer, failure to comply with the product rating plate, damage due to natural causes such as lightning or power surges, use of power supplies or drivers not approved by Hi. Project S.r.l. and/or in any case not compliant with the technical regulations that regulate the European market, damage caused by wrong connections or connections with an IP degree lower than the purchased product, damage caused during the transport (even if the transport is organized by Hi. Project S.r.l. on behalf of the Customer), other causes that are not expressly and unequivocally referred to the defectiveness of the product itself.

PRODUCT CLEANING INSTRUCTIONS

- To clean the appliance, use exclusively a soft cloth, possibly moistened with water and neutral soap.
- Warning: do not use aggressive cleansers, alcohol or solvents.

The information contained in this document may be changed by Hi.Project s.r.l. at any time without notice and does not imply the assumption, even implicit, of any obligation on the part of Hi. Project Srl.

Hi. Project Srl refuses all responsibility if the installation is not carried out by qualified personnel and in compliance with current regulations.

210 led/m 14,4W/m 3000°K ENERG 7 NECTO GROUP SRL 3SLEHFAWW10502E05 A B C D E E F G 1 kWh/1000h