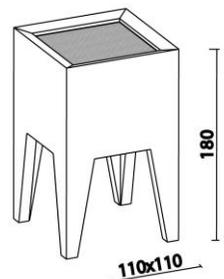


AIR PURIFIER CONSUMPTION Watt			NO. LED SOURCES			BIPOLAR IONIZER			 IP 40		
3			2			10 ¹⁰ ioni/sec			Not protected against the ingress of liquids		


N° LED/m	W/m	W	Lm ca. to the light source	Luminous efficiency	Chromatic deviation	CRI		R / V / B		
140	14,4	1x2	90x2	>140lm W	SDCM 3	80	Diffuse	-	-	3000K

Model	Description	Dimensions
	<p>ION is an air purifier, for closed environments, that uses controlled bipolar ionization technology to purify the air. ION is also a design table lamp made with cirmolo wood, cedar wood or white Corian®.</p> <p>It is provided complete with European plug-in power supply with 1,5m of cable for connection.</p> <p>The purifier / lamp is set up with two switches positioned at the bottom, one for turning the light on and off, the other for turning the purifier on and off.</p>	

Ionizer technical characteristics		Use and maintenance safety rules
Purifier / lamp:	Indoor	<ul style="list-style-type: none"> - The purifier is intended for enclosed environments use only. - Do not install the purifier in very humid environments, near heat sources or in areas with possible presence of vapors or flammable or combustible products. Never use the purifier in potentially explosive environments. - Make sure that the power supply voltage is correct before inserting the plug. - Make sure that the device wire never comes into contact with hot surfaces. - Never remove the plug by pulling on the wire but grabs it firmly when removing it from the socket; it is good practice to turn off the purifier by acting on the two switches before removing the plug. - Do not leave the cable wrapped during use. - Do not insert foreign bodies into the purifier. - Do not get close to the grids of the device with hair, they could get caught. - Do not touch the appliance or the plug with wet or damp hands. - Do not leave the device in operation within the reach of children and without adult supervision. - If incidentally water or foreign bodies get inside the purifier, immediately disconnect the plug from the electric socket. - Never open the purifier; for maintenance and repairs contact the seller. Failure to observe this rule will result in the loss of the warranty (warranty period in accordance with the law). - The purifier does not require special maintenance, normal cleaning of the ventilation grids is sufficient and, every ten days, it is good practice to clean the inside with a light breath of air. - For normal external cleaning use a slightly damp cloth. - Before carrying out any cleaning and / or maintenance operation, turn off the appliance, remove the power plug in from the socket and wait a few minutes. - To keep the characteristics of the wood unchanged, ION is not treated with protective, varnish or wax, for this reason it could accidentally stain itself if handled with dirty hands. - Never cover the air vents of the purifier, otherwise it will malfunction and be damaged
Capacity:	50 – 70m ³ (25-30m ²)*	
Ions emission:	10 ¹⁰ ions/sec	
Ions balance:	Self balancing	
Ozone emission:	0,005 ppm	
Power supply:	12v dc	
Operating temperature:	+5°c + 55°c	
Protection:	IP20	
Compliance:	<p>CE</p> <p>Also complies with the standard EN 60335-2-65 in combination with EN 60335-1. Certificate issued by the manufacturer of the ionizer element n. 9012311173 published 10/03/2010.</p>	

 Compliant with European standards EMC – RoHS – REACH - Ecodesign	 It must not be provided with a electrical ground of protection	DIMMABLE By dimmable power supply	OPERATING TEMPERATURE -20°C +40°C	 Separate waste collection of electric and electronic equipment	Made in Italy Projected, manufactured and assembled in Italy
---	--	---	---	--	---

* Capacity can vary depending on different environmental conditions (people in the room, air circulation, etc.).

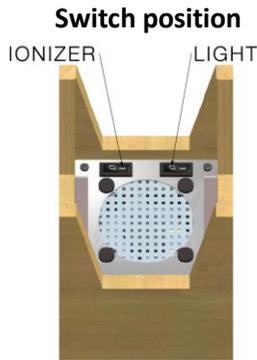Power supply		
<p>Switch position</p> 		<p>12V purifier power supply by plug-in power supply. Input 100V-240V- 50-60 Hz.</p>

WARNING AND PROVISIONS

ATTENTION!

The appliance safety is guaranteed only by respecting, both during installation and employment phase, of the following instructions. It is therefore necessary to archive the present document.

WARNINGS:

- The power supply voltage must be removed during the installation and during any operation.
- The appliance must not be modified or tampered with in any way. Every modification can compromise the safety of the appliance, making it dangerous. Hi.Project srl refuses any responsibility for modified or tampered with products. Modifications or tampering with the product, if not authorized by the company (Hi.Project s.r.l.), nullify any direct and indirect responsibility of the manufacturer as well as the warranty.
- The appliance is free from the photobiological risk. Please follow the instructions of this data sheet.
- The product is to be considered a "Containing Product" and is not subject to maintenance. The light source can only be replaced by the manufacturer. For further information please contact Hi.Project s.r.l.
- If the flexible power cable is damaged, it can be substituted only by the manufacturer. For further information please contact Hi.Project s.r.l.
- Each product, at the end of its life, must be committed to a waste storage center specialized in electrical and electronic equipment. Alternatively, it can be returned to the manufacturer.

WARRANTY CONDITIONS:

Our products are guaranteed for 24 months from the date of purchase. The warranty only covers construction defects attributable to the manufacturer. The warranty does not include all the activities necessary for the product to arrive free port at the manufacturer for repair. The warranty is void if the malfunction is due to: improper use of the product, tampering, repairs not authorized by Hi. Project S.r.l., negligence of the installer, failure to comply with the product rating plate, damage due to natural causes such as lightning or power surges, use of power supplies or drivers not approved by Hi. Project S.r.l. and/or in any case not compliant with the technical regulations that regulate the European market, damage caused by wrong connections or connections with an IP degree lower than the purchased product, damage caused during the transport (even if the transport is organized by Hi. Project S.r.l. on behalf of the Customer), other causes that are not expressly and unequivocally referred to the defectiveness of the product itself.

PRODUCT CLEANING INSTRUCTIONS

- To clean the appliance, use exclusively a soft cloth, possibly moistened with water and neutral soap.
- Warning: do not use aggressive cleansers, alcohol or solvents. The information contained in this document may be changed by Hi.Project s.r.l. at any time without notice and does not imply the assumption, even implicit, of any obligation on the part of Hi. Project Srl. Hi. Project Srl refuses all responsibility if the installation is not carried out by qualified personnel and in compliance with current regulations

140 led/m
14,4W/m 3000°K

