








N° LED/m	W/m	Lm/m to the light source	Luminous efficiency	Chromatic Deviation	CRI	IP40		R / V / B		
140	9,6	1224	>140lm W	SDCM 3	80-90	Not protected against the ingress of liquids	Diffuse	-	-	2700K – 3000K – 4000K
140	14,4	1802	>140lm W	SDCM 3	80-90	Not protected against the ingress of liquids	Diffuse	-	-	2700K – 3000K – 4000K
210	14,4	1836	>140lm W	SDCM 3	80	Not protected against the ingress of liquids	Diffuse	-	-	2700K – 3000K – 4000K
128	23	3600	>150lm W	SDCM 3	80	Not protected against the ingress of liquids	Diffuse	-	-	2700K – 3000K – 4000K

* The above data refer to a temperature of 3000K

Model		Description	Dimensions 24 x 29.52 x L mm	
 Round	 Square	On-wall/ceiling Led bar with aluminum terminals. Finish: anodized aluminum silver grey color, other colors on request. Screen: opal with rounded or prismatic shape. It is provided with 25cm bipolar cable for the electrical connection. Maximum length 2000mm (longer lengths on request). Indoor installation on any rigid surface by suitable "L" brackets. Fixing by screws, suitable to the support, with maximum diameter 3mm not supplied by us.		

ELECTRICITY SUPPLY: 24V parallel electrical connection SELV POWER SUPPLY, not included, remotely placed.

Parallel electrical connection. POLARITY: **RED cable + / BLACK cable -**

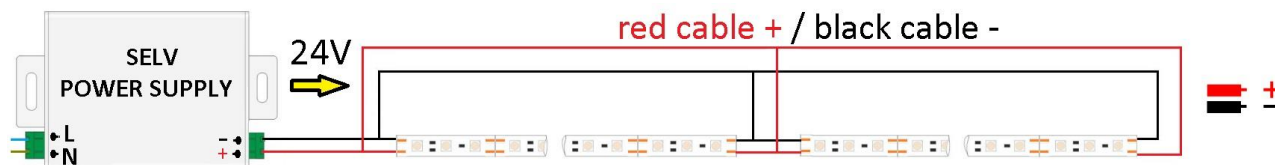

Connection: Connector compliant with EN 60998-2-1

ATTENTION

The protection degree of the connection system must be identical or greater than the protection degree of the product. The junction clips are not included. The installation must be carried out by qualified Personnel

(FACSIMILE)



ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. The connection to the electricity grid must be carried out only after completing the wiring of all the components. If this simply rule is not respected, the lighting source will be irretrievably damaged. The installation must be carried out by qualified personnel.

Compliant with European standards EMC – RoHS – REACH - Ecodesign

It must not be provided with a electrical ground of protection



DIMMABLE
By dimmable power supply

OPERATING TEMPERATURE
-20°C +40°C

Separate waste collection of electric and electronic equipment


Made in Italy
Projected, manufactured and assembled in Italy

Fixing by bracket ST.031.031 with screws maximum diameter 3mm.

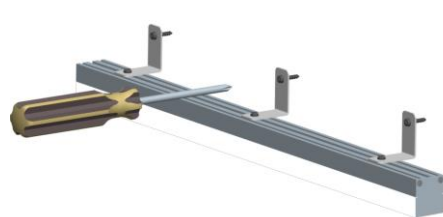

31x31x15

Fixing by bracket ST.031.014 with screws maximum diameter 3mm.

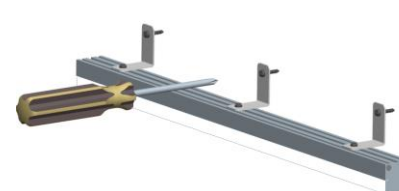

31x14x15

WARNING AND PROVISIONS

ATTENTION!

The appliance safety is guaranteed only by respecting, both during installation and employment phase, of the following instructions. It is therefore necessary to archive the present document.

WARNINGS:

- The power supply voltage must be removed during the installation and during any operation.
 - The appliance must not be modified or tampered with in any way. Every modification can compromise the safety of the appliance, making it dangerous.
- Hi.Project srl refuses any responsibility for modified or tampered with products. Modifications or tampering with the product, if not authorized by the company (Hi.Project s.r.l.), nullify any direct and indirect responsibility of the manufacturer as well as the warranty.
- The appliance is free from the photobiological risk. Please follow the instructions of this data sheet.
 - The product is to be considered a "Containing Product" and is not subject to maintenance. The light source can only be replaced by the manufacturer. For further information please contact Hi.Project s.r.l.
 - If the flexible power cable is damaged, it can be substituted only by the manufacturer. For further information please contact Hi.Project s.r.l.
 - Each product, at the end of its life, must be committed to a waste storage center specialized in electrical and electronic equipment. Alternatively, it can be returned to the manufacturer.

WARRANTY CONDITIONS:

Our products are guaranteed for 24 months from the date of purchase. The warranty only covers construction defects attributable to the manufacturer. The warranty does not include all the activities necessary for the product to arrive free port at the manufacturer for repair. The warranty is void if the malfunction is due to: improper use of the product, tampering, repairs not authorized by Hi. Project S.r.l., negligence of the installer, failure to comply with the product rating plate, damage due to natural causes such as lightning or power surges, use of power supplies or drivers not approved by Hi. Project S.r.l. and/or in any case not compliant with the technical regulations that regulate the European market, damage caused by wrong connections or connections with an IP degree lower than the purchased product, damage caused during the transport (even if the transport is organized by Hi. Project S.r.l. on behalf of the Customer), other causes that are not expressly and unequivocally referred to the defectiveness of the product itself.

PRODUCT CLEANING INSTRUCTIONS

- To clean the appliance, use exclusively a soft cloth, possibly moistened with water and neutral soap.
- Warning: do not use aggressive cleansers, alcohol or solvents.

The information contained in this document may be changed by Hi.Project s.r.l. at any time without notice and does not imply the assumption, even implicit, of any obligation on the part of Hi. Project Srl.

Hi. Project Srl refuses all responsibility if the installation is not carried out by qualified personnel and in compliance with current regulations.

210 led/m
14,4W/m 3000°K



128 led/m
23W/m 3000°K

