







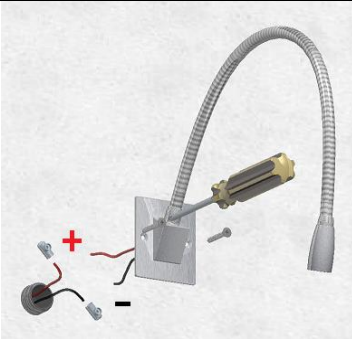



N° LED	W	Lm to the light source				R / V / B		
01	1.2	110	350mA	IP40	25°	-	-	2700K 3000K 4000K

Model	Description	Dimension
	<p>Stainless steel Led light body on a flexible stem, wall mounted. Finish: rigid parts in stainless steel, flexible part in satin nickel. Screen: transparent polycarbonate It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any rigid surface. Fixing by two visible screws suitable for the support not supplied by us.</p>	

		
Prepare the exit of the power cables	Carry out the electrical connection and fix the lighting body with two screws suitable for the support	Final result

<p>Series electrical connection 350mA SELV. POLARITY:</p> <p>RED cable + BLACK cable -</p>	<p>Connection: Connector compliant with EN 60998-2-1 standards.</p>
	<p>(FACSIMILE)</p> 

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

<p>Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))</p>	<p>CLASS III Operating with SELV</p>	<p>POWER SUPPLY By remote power supply SELV OUTPUT 350mA constant current</p>	<p> Separate waste collection of electric and electronic equipment</p>	<p>Made in Italy Projected, manufactured and assembled in Italy</p>
--	---	--	---	--