






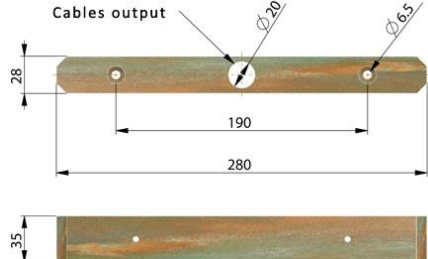


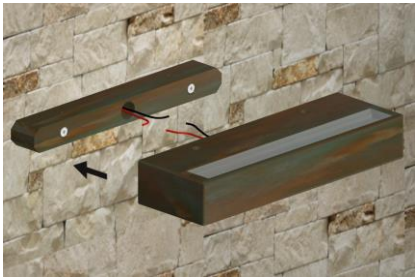








N° LED (double emission)	W	Lm to the light source				R / V / B		
67	9,5	1250	24V	IP40	DIFFUSE	-	-	2700K 3000K 4000K

Model	Description	Dimensions 300x100x50mm	Fixing support
	On-wall Led light body in aluminum. Finish: varnished faux corten, other colors on request. Screen: opal polycarbonate. It is provided with two 25cm cables for the electrical connection. Installation: indoor on the wall on any plane surface. Fixing by two screws not supplied by us.	 300x100x50	

				
Positioning the lamp and carry out the hole for the plug	Insert the plug and fix the support	Carry out the electrical connection and insert the Led light body	Fix the Led light body to the support	Finished work

Parallel electrical connection 24V: Polarity: RED cable + BLACK cable -	Connection: Connector compliant with EN 60998-2-1 standards
	(FACSIMILE) 

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

	Compliant to the European legislations (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	CLASS III Operating with SELV	POWER SOURCE By remote power supply SELV OUTPUT 24V constant voltage		Separate waste collection of electric and electronic equipment	Made in Italy Projected, manufactured and assembled in Italy
HI Project Srl	Via Mario Luciani 4/E - 32032 Feltre (BL)	Tel. 0439 310098	info@hiproject.it	www.brillamenti.it	CF - PI e n. isc. reg. imprese 00967030255	