





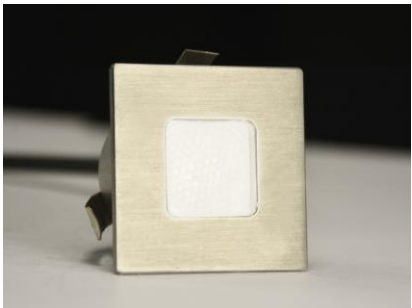
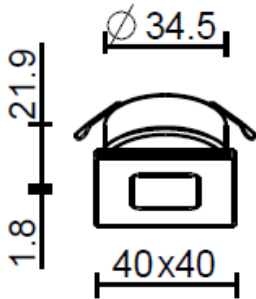

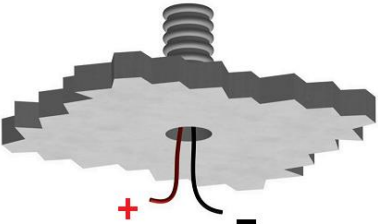
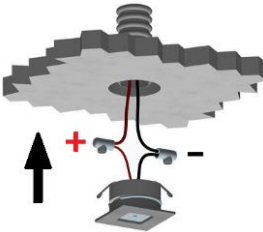
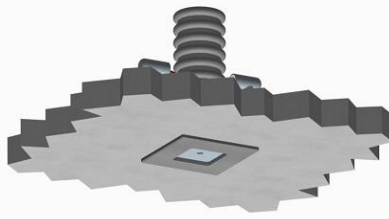





N° LED	W	Lm to the light source				R / V / B		
01	1,2	110	350mA	IP40	DIFFUSE - 7° - 25° - 40°		-	2700K 3000K 4000K
01	4,2	-	350mA	IP40	DIFFUSE- 40°	-	RGBW	- - -

Model	Description	Dimensions 40x40x25mm	Hole for fixing Ø36mm
	Ceiling recessed Led light body in aluminum. Squared emission hole. Finish: grey anodized aluminum, other colors on request. Screen: opal/transparent polycarbonate. It is provided with 25cm bipolar cable for the electrical connection. Indoor installation on any rigid surface. Pressure fixing on 36mm diameter compartment, minimum depth 26mm.		 Hole Ø 36mm

		
Drill the hole Ø36mm	Carry out the electrical connection respecting the polarity. Insert in position.	Final result.

Series electrical connection 350mA SELV. POLARITY: RED cable + BLACK cable -	Connection: Connector compliant with EN 60998-2-1 standards.	POLARITY RGBW:
	(FACSIMILE) 	WHITE LED (+ = GREY) (- = WHITE) RED LED (+ = BLACK) (- = RED) GREEN LED (+ = TRANSPARENT) (- = GREEN) BLUE LED (+ = BROWN) (- = BLUE)

ATTENTION: Before starting all electrical connections, make sure that the power supply is not powered. If this simply rule is not respected, the lighting source will be irretrievably damaged.

 Compliant with European standards (EMC, RoHS, Ecodesign and requirements specified in the Low Voltage Directive (LVD))	CLASS III Operating with SELV	POWER SUPPLY By remote power supply SELV OUTPUT 350mA constant current. For 350mA RGB please see the pilot module power supply.	 Separate waste collection of electric and electronic equipment	Made in Italy Projected, manufactured and assembled in Italy
HI Project Srl Via Mario Luciani 4/E - 32032 Feltre (BL)	Tel. 0439 310098	info@hiproject.it	www.brillamenti.it	CF - PI e n. isc. reg. imprese 00967030255